




SAE B CAST IRON GEAR PUMP OR MOTOR

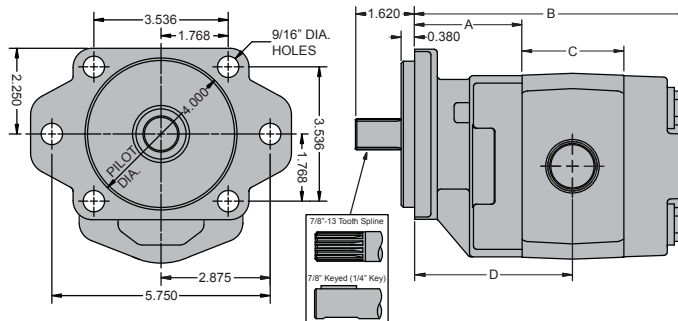

Technical Information

- Permco
- Available in splined and keyed shafts
- Can be run clockwise or counterclockwise
- Some models can be used as a motor
- Great for PTO Applications
- Dual Ported, One Port on Each Side & Two Ports in the Rear
- Rugged Cast Iron Design
- 2/4 Bolt SAE 'B' Mounting Flange



Stock Number	Rotation	Shaft Type/Size	Application	In3 Per Rev.	GPM @ 1725 RPM	Max PSI	RPM Range	Side Ports Size	Rear Ports Size	A Dim.	B Dim.	C Dim.	D Dim.	Ship Wt.
6200079	CW or CCW	7/8-13 Splined	Pump or Motor	2.0	13.64	3000	600-2400	3/4" NPTF	1" NPTF	2.940"	6.440"	1.750"	3.810"	38
6200081	CW or CCW	7/8" Keyed, 1/4" Key	Pump or Motor	2.0	13.64	3000	600-2400	3/4" NPTF	1" NPTF	2.940"	6.440"	1.750"	3.810"	38
6200083	CW or CCW	7/8-13 Splined	Pump or Motor	2.5	17.05	3000	600-2400	1" NPTF	1" NPTF	2.940"	6.690"	2.000"	3.935"	39
6200085	CW or CCW	7/8" Keyed, 1/4" Key	Pump or Motor	2.5	17.05	3000	600-2400	1" NPTF	1" NPTF	2.940"	6.690"	2.000"	3.935"	39
6200087	CW or CCW	7/8-13 Splined	Pump or Motor	3.0	20.45	3000	600-2400	1" NPTF	1" NPTF	2.940"	6.940"	2.250"	4.060"	40
6200089	CW or CCW	7/8" Keyed, 1/4" Key	Pump or Motor	3.0	20.45	3000	600-2400	1" NPTF	1" NPTF	2.940"	6.940"	2.250"	4.060"	40
6200091	CW or CCW	7/8-13 Splined	Pump or Motor	3.5	23.86	2500	600-2400	1-1/4" NPTF	1" NPTF	2.940"	7.190"	2.500"	4.185"	41
6200093	CW or CCW	7/8" Keyed, 1/4" Key	Pump or Motor	3.5	23.86	2500	600-2400	1-1/4" NPTF	1" NPTF	2.940"	7.190"	2.500"	4.185"	41
6200095	CW or CCW	7/8-13 Splined	Pump or Motor	4.0	27.27	2500	600-2400	1-1/4" NPTF	1" NPTF	2.940"	7.440"	2.750"	4.310"	42
6200097	CW or CCW	7/8" Keyed, 1/4" Key	Pump or Motor	4.0	27.27	2500	600-2400	1-1/4" NPTF	1" NPTF	2.940"	7.440"	2.750"	4.310"	42

