




SAE B CAST IRON GEAR PUMP

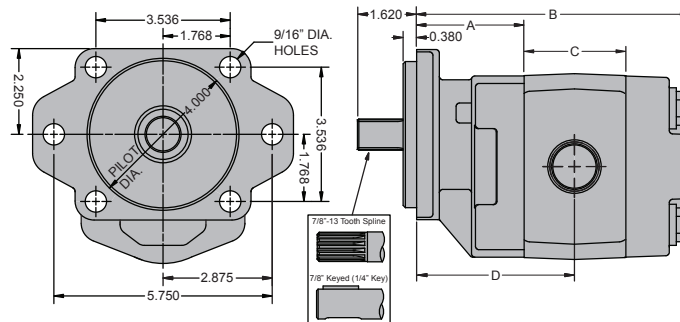

Technical Information

- Permco
- Available in splined and keyed shafts
- Can be run clockwise or counterclockwise
- Great for PTO Applications
- Dual Ported, One Port on Each Side & Two Ports in the Rear
- Rugged Cast Iron Design
- 2/4 Bolt SAE 'B' Mounting Flange



Stock Number	Rotation	Shaft Type/Size	Application	In3 Per Rev.	GPM @ 1725 RPM	Max PSI	RPM Range	Side Ports Size	Rear Ports Size	A Dim.	B Dim.	C Dim.	D Dim.	Ship Wt.
6200124	CW or CCW	7/8-13 Splined	Pump Only	4.5	30.68	3000	600-2400	1-1/4" NPTF	1-1/2" NPTF	2.380"	6.630"	2.500"	3.630"	51
6200126	CW or CCW	7/8-13 Splined	Pump Only	5.2	35.45	3000	600-2400	1-1/4" NPTF	1-1/2" NPTF	2.380"	6.880"	2.750"	3.750"	53
6200128	CW or CCW	7/8-13 Splined	Pump Only	5.8	39.55	3000	600-2400	1-1/2" NPTF	1-1/2" NPTF	2.380"	7.130"	3.000"	3.880"	55
6200130	CW or CCW	7/8-13 Splined	Pump Only	6.4	43.64	3000	600-2400	1-1/2" NPTF	1-1/2" NPTF	2.380"	7.380"	3.250"	4.000"	57

