




HP: 1–150
Pole: 2/4

Frame: 143T–445T
Volt: 208–230/460V

RPM: 1800/3600
BODY: T

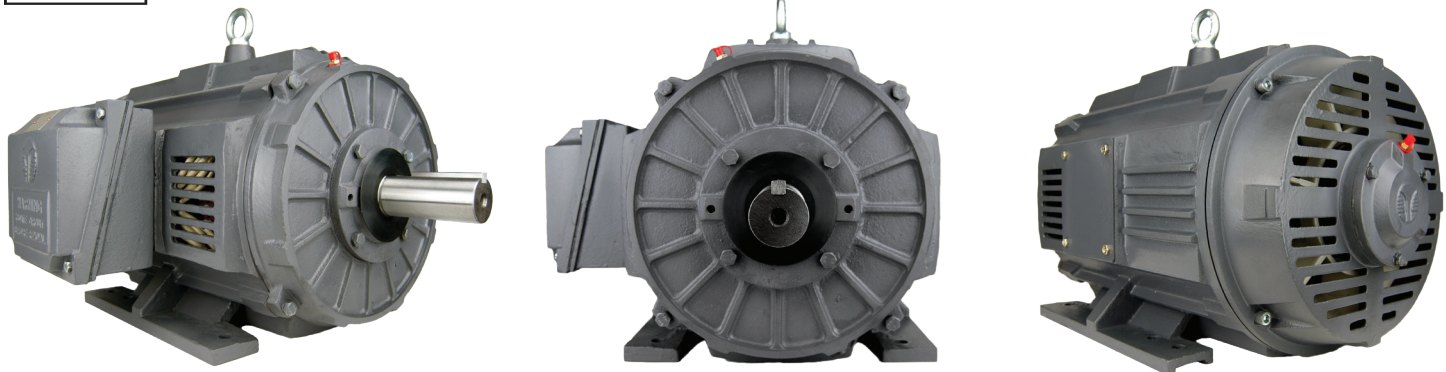

STANDARD FEATURES

- NEMA Premium Efficiency
- Inverter Rated - 15:1 Constant Torque
- MG 1 Part 31 Compliant for VFD use
- IP 23 Rated - 40° Ambient Rating
- Double Lip Oil Seals on DE & ODE
- 1.25 SF up to 50HP (1.15 for larger frames)
- Vacuum Pressure Impregnated Winding
- Tropicalization Protection on Winding



- 1045 Steel Shaft (through 326T), 4140 (360T and up)
- Zerk Regreasable Bearings 254 Frame & Larger
- Nipple Seals Between Conduit Box and Body
- Rubber Slinger
- Conduit Box is 90° Rotatable
- Class H Insulation with Class F Stator
- C Flanges Available
- 36 Month Warranty from Date of Purchase

HP	Sync Speed	Model Number
1	3600	GR3-RS-OP-143T-2-B-D-1
	1800	GR3-RS-OP-143T-4-B-D-1
1.5	3600	GR3-RS-OP-143T-2-B-D-1.5
	1800	GR3-RS-OP-145T-4-B-D-1.5
2	3600	GR3-RS-OP-145T-2-B-D-2
	1800	GR3-RS-OP-145T-4-B-D-2
3	3600	GR3-RS-OP-145T-2-B-D-3
	1800	GR3-RS-OP-182T-4-B-D-3
5	3600	GR3-RS-OP-182T-2-B-D-5
	1800	GR3-RS-OP-184T-4-B-D-5
7.5	3600	GR3-RS-OP-184T-2-B-D-7.5
	1800	GR3-RS-OP-213T-4-B-D-7.5
10	3600	GR3-RS-OP-213T-2-B-D-10
	1800	GR3-RS-OP-215T-4-B-D-10
15	1800	GR3-CI-OP-254T-4-BR-D-15

HP	Sync Speed	Model Number
20	1800	GR3-CI-OP-256T-4-BR-D-20
25	1800	GR3-CI-OP-284T-4-BR-D-25
30	1800	GR3-CI-OP-286T-4-BR-D-30
40	1800	GR3-CI-OP-324T-4-BR-D-40
50	1800	GR3-CI-OP-326T-4-BR-D-50
60	1800	GR3-CI-OP-364T-4-BR-D-60
	1800	GR3-CI-OP-365T-4-BR-D-75
75	1800	GR3-CI-OP-365T-4-RR-D-75
	1800	GR3-CI-OP-404T-4-BR-D-100
100	1800	GR3-CI-OP-404T-4-RR-D-100
	1800	GR3-CI-OP-444T-4-BR-E-125
125	1800	GR3-CI-OP-444T-4-RR-E-125
	1800	GR3-CI-OP-445T-4-BR-E-150
150	1800	GR3-CI-OP-445T-4-RR-E-150