



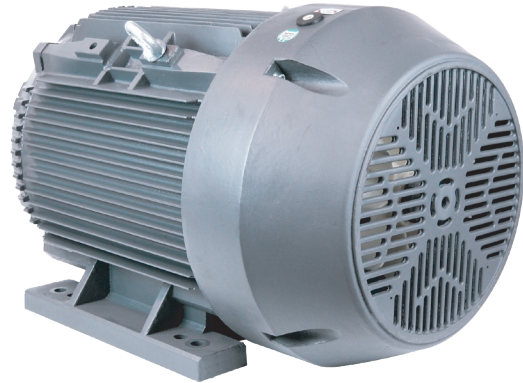

**HP:** 75–300  
**Pole:** 4/6

**Frame:** 365T–449T  
**Volt:** 460V

**RPM:** 1800/1200  
**Body:** T

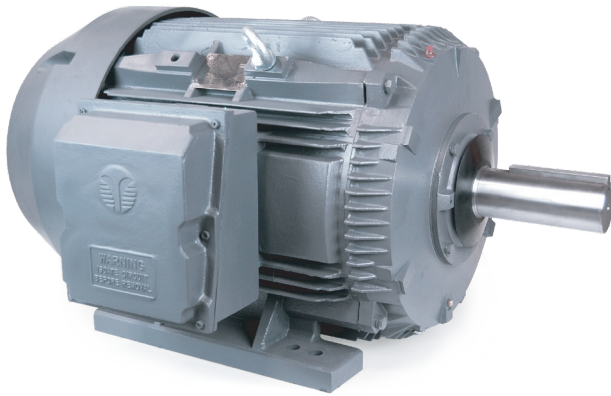

## STANDARD FEATURES



- NEMA Premium Efficiency- Design C Torque
- 6 Lead - 460V
- Drive-end Roller Bearing
- Oversized Bearings on DE & ODE
- 1.15 Service Factor
- 40° C Ambient Temperature Rated
- VPI Lap Wound Coil
- Wye-Delta Start Wound
- 4140 Carbon Steel Shaft

- Zerk Fitting Regreaseable Bearing
- Full Cast Iron Construction
- Double Lip Oil Seals on DE & ODE
- Rubber Slinger
- Split Conduit Box is 90° Rotatable
- F1 to F2 Field Convertible ( Shipped F1)
- Class F Insulation with Class H Stator
- EISA Compliant
- 24 Month Warranty from Purchase Date

HP	Sync. Speed	Model Number
75	1800	OX3-CI-TF-365T-4-RR-E-75
	1200	OX3-CI-TF-405T-6-RR-E-75
100	1800	OX3-CI-TF-405T-4-RR-E-100
	1200	OX3-CI-TF-444T-6-RR-E-100
125	1800	OX3-CI-TF-444T-4-RR-E-125
	1200	OX3-CI-TF-445T-6-RR-E-125
150	1800	OX3-CI-TF-445T-4-RR-E-150
	1200	OX3-CI-TF-447T-6-RR-E-150
200	1800	OX3-CI-TF-447T-4-RR-E-200
	1200	OX3-CI-TF-449T-6-RR-E-200
250	1800	OX3-CI-TF-449T-4-RR-E-250
300	1800	OX3-CI-TF-449T-4-RR-E-300

**Lift Strap  
Included**

