


Three Phase Motor AC Power Unit

Pressure & Tank



Technical Information

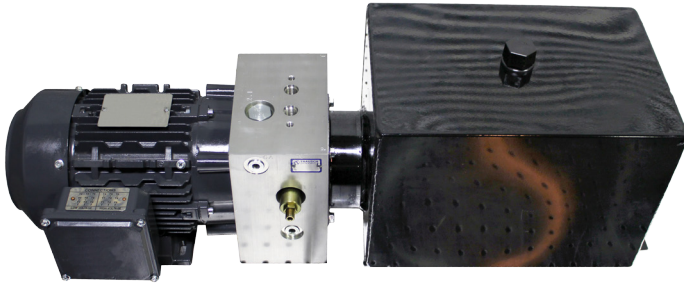

- Continuous Duty
- 1 HP, 1.5 HP, or 2 HP Available
- Three Phase
- CW Rotation
- IP 55 Protection Rated
- Relief Valve Set at 3000 PSI
- #6 SAE O-Ring Pressure & Tank Ports
- #12 SAE O-Ring Auxiliary Tank Port
- Steel Tank
- Tank is Painted Black

Item Number	HP	Flow	Maximum Pressure	Voltage	Amps	Maximum RPM	Tank Capacity	Dim. A	Dim. B	Dim. C	Weight
9504840	1 HP	0.46 GPM	3000 PSI	208-230/460 V	3.3-3.24/1.62 A	1800	1 Gallon Round	22.47"	9.0"	6.63" DIAMETER	44 lbs
9504848	1 HP	0.46 GPM	3000 PSI	208-230/460 V	3.3-3.24/1.62 A	1800	1.5 Gallons Round	26.97"	13.5"	6.63" DIAMETER	45 lbs
9504856	1 HP	0.46 GPM	3000 PSI	208-230/460 V	3.3-3.24/1.62 A	1800	2.5 Gallons Square	26.72"	13.25"	8.0" SQUARE	51 lbs
9504864	1 HP	0.46 GPM	3000 PSI	208-230/460 V	3.3-3.24/1.62 A	1800	3.5 Gallons Square	31.35"	17.88"	8.0" SQUARE	54 lbs
9504904	1.5 HP	0.77 GPM	3000 PSI	208-230/460 V	4.65-4.5/2.25 A	1800	1 Gallon Round	22.47"	9.0"	6.63" DIAMETER	47 lbs
9504912	1.5 HP	0.77 GPM	3000 PSI	208-230/460 V	4.65-4.5/2.25 A	1800	1.5 Gallons Round	26.97"	13.5"	6.63" DIAMETER	48 lbs
9504920	1.5 HP	0.77 GPM	3000 PSI	208-230/460 V	4.65-4.5/2.25 A	1800	2.5 Gallons Square	26.72"	13.25"	8.0" SQUARE	54 lbs
9504928	1.5 HP	0.77 GPM	3000 PSI	208-230/460 V	4.65-4.5/2.25 A	1800	3.5 Gallons Square	31.35"	17.88"	8.0" SQUARE	57 lbs
9504968	2 HP	1.01 GPM	3000 PSI	208-230/460 V	6.25-6.06/3.03 A	1800	1 Gallon Round	22.47"	9.0"	6.63" DIAMETER	52 lbs
9504976	2 HP	1.01 GPM	3000 PSI	208-230/460 V	6.25-6.06/3.03 A	1800	1.5 Gallons Round	26.97"	13.5"	6.63" DIAMETER	53 lbs
9504984	2 HP	1.01 GPM	3000 PSI	208-230/460 V	6.25-6.06/3.03 A	1800	2.5 Gallons Square	26.72"	13.25"	8.0" SQUARE	59 lbs
9504992	2 HP	1.01 GPM	3000 PSI	208-230/460 V	6.25-6.06/3.03 A	1800	3.5 Gallons Square	31.35"	17.88"	8.0" SQUARE	62 lbs

