



# Arrowick Lubricators

## SPECIFICATIONS

### Body

- Black coated aluminum

### Metal Bowl

- Steel, black coated
- Max. pressure 250 psig
- Operating temperature range 40°F to 200°F

### Recommended Oil

- SAE 10 oil or lighter
- 30 scfm to establish drip rate

### Droplet Size

- 3 micron or less

## KITS

### Bowl Kits

- 29 oz. metal . . . . . BK4106M
- 29 oz. metal with sight . . . . . BK4106W
- 2 qt. metal with sight . . . . . BK4106LCM

### Repair Kits

- For 4106, 4106LCM, 4108, and 4108LCM . . . . . RK4106
- For 4112 and 4112LCM . . . . . RK4112
- Sight kit . . . . . WK35

### Applications

- Single point
- Flow can be reversed



## FEATURES

- Simple, trouble free design. It cannot be over-filled, and has greater bowl capacity which extends interval between filling
- Can be used downstream of 4 way valves because it accommodates reverse flow
- Bowl fills all the way to the top
- It can be filled under pressure no need to shut down air
- Tamper-proof internal adjustment
- Porous bronze oil metering diffuser introduces smallest possible oil particles to the air
- No small orifices to clog and stop oil delivery
- Automatically maintains air-oil ratio regardless of variations in air flow

## OPTIONS

add suffix to part number in alpha order  
**W** metal bowl w/sight glass . . . 4108W

| Minimum Air Flow for Lubrication |               |
|----------------------------------|---------------|
| Model No.                        | Air Flow SCFM |
| 4106                             | 30 SCFM       |
| 4106LCM                          | 30 SCFM       |
| 4108                             | 30 SCFM       |
| 4108LCM                          | 30 SCFM       |
| 4112                             | 50 SCFM       |
| 4112LCM                          | 50 SCFM       |

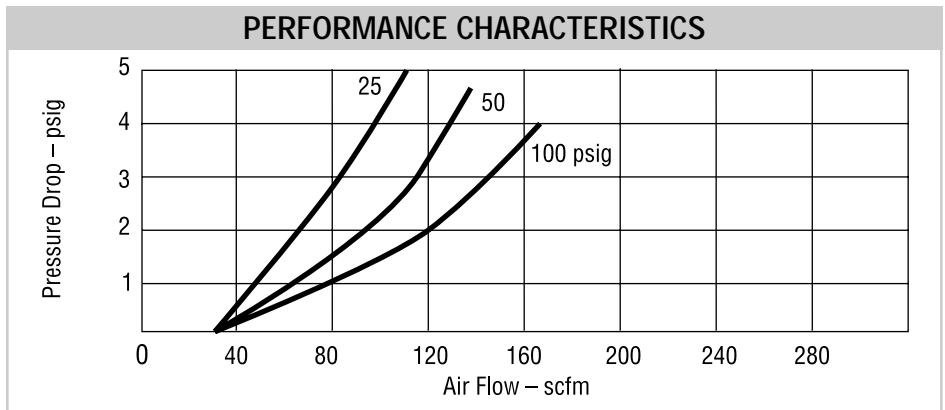

## DIMENSIONS

| PIPE SIZE | MODEL NO. | MAX. FLOW SCFM* | BOWL CAPACITY | DIMENSIONS (INCHES) |       |        | WEIGHT (LBS.) |
|-----------|-----------|-----------------|---------------|---------------------|-------|--------|---------------|
|           |           |                 |               | A                   | B     | C      |               |
| 3/4"      | 4106      | 175             | 29 oz.        | 4 7/8               | 1 1/8 | 8 7/8  | 3.5           |
| 1"        | 4108      | 175             | 29 oz.        | 4 7/8               | 1 1/8 | 8 7/8  | 3.5           |
| 1 1/2"    | 4112      | 175             | 29 oz.        | 5 1/4               | 1 1/4 | 9      | 3.5           |
| 3/4"      | 4106LCM   | 175             | 60 oz.        | 4 7/8               | 1 1/8 | 13 1/2 | 6.0           |
| 1"        | 4108LCM   | 175             | 60 oz.        | 4 7/8               | 1 1/8 | 13 1/2 | 6.0           |
| 1 1/2"    | 4112LCM   | 175             | 60 oz..       | 5 1/4               | 1 1/4 | 13 1/2 | 6.0           |

\* Flow scfm based on 5.0 psi Δ p @ 100 psig inlet.