



Tri-Star Series 3 Arrowfog Lubricators

L3

OPTIONS

add suffix to part number in alpha order

- M** 6 oz. black coated metal bowl L354M
- W** 6 oz. black coated metal bowl with sight L354W

SPECIFICATIONS

WARNING! Polycarbonate plastic bowls could rupture if exposed to incompatible chemicals whether inside or outside the bowl. If such chemicals are present, use a metal bowl.

Body

- Black coated aluminum

Polycarbonate Bowl with Bowl Guard

- Max. pressure 150 psig
- Operating temperature range 40°F to 125°F

Metal Bowl

- Zinc, black coated
- Max. pressure 200 psig
- Operating temperature range 40°F to 175°F

Metal Bowl with Sight

- Zinc, black coated
- Max. pressure range 200 psig
- Operating temperature range 40°F to 175°F

Recommended Oil

- SAE 10 oil or lighter
- Atomized average 2 micron

KITS

Bowl Kits

- Polycarbonate BKL35
- Metal bowl without sight BKL45M
- Metal bowl with sight BKL45W

Repair Kits

- For L350 RKL352
- Dome kit AK35
- Fill plug kit FK35

Mounting Kit see page 65

- Mounting kit FBK5





Applications

- Air tools
- Air motors
- Single point lubrication

FEATURES

- Aluminum housing
- Oil delivery at low air flow approximately 2 scfm
- Lubricator may be filled without shutting down air line
- 3-position non-rotating adjustment knob; push to lock, pull to adjust, detach for tamper resistant
- Can be converted on-line to Ultrafog lubricator with interchangeable module Part # RKL452

PERFORMANCE CHARACTERISTICS

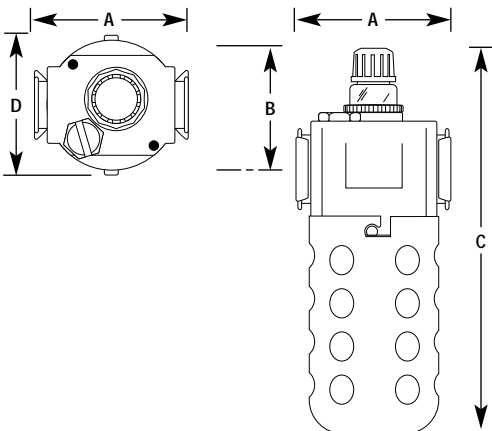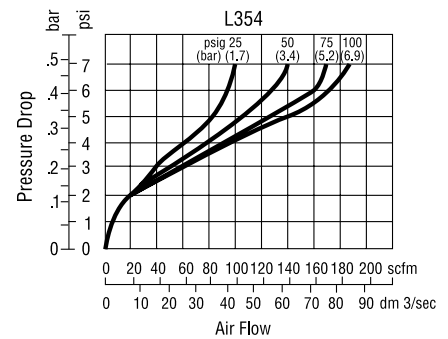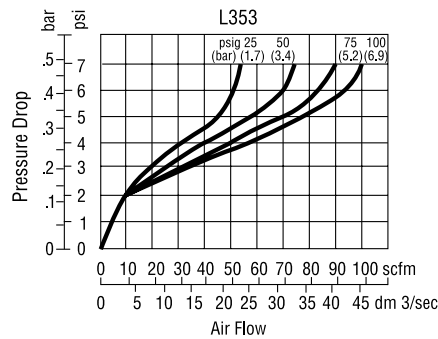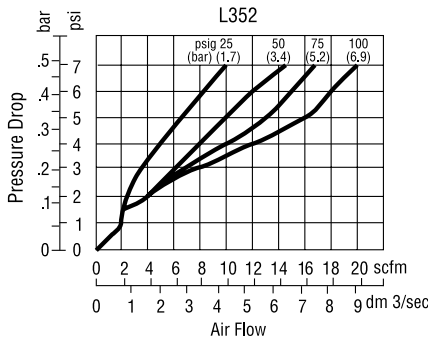

DIMENSIONS

PIPE SIZE	MODEL NO.	MAX. FLOW SCFM*	BOWL CAPACITY	DIMENSIONS (INCHES)				WEIGHT (LBS.)
				A	B	C	D	
1/4"	L352	16	5 oz.	2 ³ / ₄	2 ¹ / ₈	7"	2 ¹ / ₂	1.0
3/8"	L353	82	5 oz.	2 ³ / ₄	2 ¹ / ₈	7"	2 ¹ / ₂	1.0
1/2"	L354	142	5 oz.	2 ³ / ₄	2 ¹ / ₈	7"	2 ¹ / ₂	1.0

* Flow scfm based on 5.0 psi Δ p @ 100 psig inlet.