GHT GAGES - CLOSED

G635 SERIES

The G635 Series front mount closed circuit sight gage provides 270° of viewing the fluid level clearly delineated by a redline on white background integral to the sight glass all secured within an aluminum body (HIGH-LOW markings). The oversized gage body allows a deeper recess of the sight glass for maximum protection of the sight glass against damage.

Standard Features:

Front mount

270° of viewing the fluid level (.88 inch front and .50 inch side width windows)

Viewing enhanced by redline on white background integral to sight glass

Suitable for use with most hydraulic and machine lubricating oils

Standard Materials:

- Aluminum gage body and mounting bolts
- Buna N seals
- Borosilicate glass sight
- Zinc plated, steel hex nuts


Temperature and Pressure Ratings:

- Please refer to Appendix RA-1 on page RA-A1 for Sight Opening & Pressure Rating information
- Please refer to Temperature Ratings by Seal Material for additional operating conditions (Appendix RA-5 on page RA-A5))

NOTE:

• Please refer to Appendix RA-2 on page RA-A2 for installation instructions

CAUTION: · Not recommended for use with water, steam, acidic fluids, caustic fluids and volatile fluids · If aluminum construction is selected for a water application, anodizing is recommended

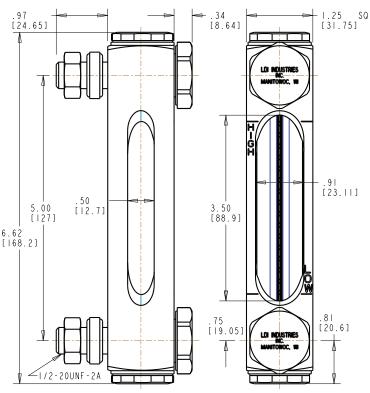



NOTE: All dimensions are inches [mm]

ORDERING OPTIONS CODES:

BODY MATERIAL

Aluminum gage body (standard) -A--B-Brass gage body (optional) **SEAL MATERIAL**

Buna N seals (standard) -1--2-Butyl seals (optional) -3-Viton® seals (optional)

-4-Ethylene propylene séals (optional)

-5-Silicone seals (optional)

HOW TO ORDER

EXAMPLE: <u>G635-05-</u>А

Buna N Seals

Aluminum gage body 5.00 (127.00 mm) mounting centers

Series G635

Dimensions and specifications are subject to change without notice. Not all items are Made-To-Stock, contact us for availability.