

LUBRICATORS & DISPENSERS

RFF100 SERIES

The RFF100 Series of full flow dispensers is designed to serve as a central reservoir for lubricating systems. Reservoirs are gravity feed and provide a full flow of oil which can be manually shut off by flipping the toggle at the top of the reservoir to a horizontal position. Electric Solenoid shut off is available. Reservoirs provide a 360° visual check of fluid level and condition. All reservoirs also feature a self-closing snap lid filler cap, vented on the vertical plane to minimize the possibility of dust and dirt from entering the reservoir through the vent. Reservoirs can be disassembled for occasional cleaning.

Standard Materials:


- Aluminum construction
- Buna N seals
- Break resistant, colorless transparent polymer

Temperature and Pressure Ratings:

- Maximum working temperature up to 140°F (60°C)
- Rating is at atmospheric pressure

NOTE:

- Please refer to Appendix LE-3 on page LE-A3 for Toggle Valve Adjustment Instructions

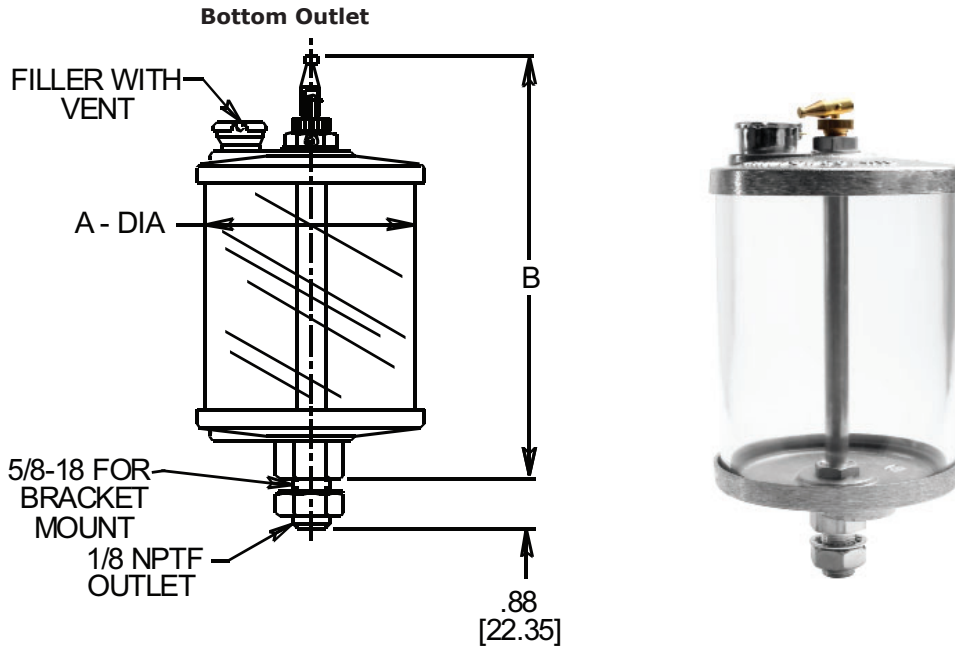

NOTE: All dimensions are inches [mm]

RFF100 Series			
Part No.	Capacity	A inches (mm)	B inches (mm)
RFF101	9.00 oz (266.20 mL)	3.00 (76.20)	6.00 (152.40)
RFF102	12.00 oz (354.90 mL)	3.00 (76.20)	7.00 (177.80)
RFF103	1.00 pt (.47 L)	3.50 (88.90)	7.00 (177.80)
RFF104	1.00 qt (.95 L)	4.25 (107.95)	8.25 (209.55)
RFF105	.50 gal (1.90 L)	5.50 (139.70)	10.25 (260.35)
RFF106	1.00 gal (3.80 L)	5.50 (139.70)	15.25 (387.35)

**MODIFICATIONS AVAILABLE MADE TO ORDER - CONSULT OUR FACTORY
(MINIMUM ORDER MAY BE REQUIRED)**

Dimensions and specifications are subject to change without notice. Not all items are Made-To-Stock, contact us for availability.

04/16

Ph : 920-682-6877
Fx : 920-684-7210



sales@ldi-industries.com
www.ldi-industries.com