

METERING & SHUT OFF VALVES

NVM SERIES

The NVM Series is designed for controlled multiple oiling from central location. Lubricant, (in reservoir of dispenser) individually metered at valve bank, travels to various points servicing hard to get at places, and eliminating individual oil cups. Easily disassembled for cleaning. Individual valves remove without disturbing other components. Gravity feed valves are furnished with a vented sight chamber, provided by a split in the gasket above the sight glass.

Standard Features:


- Pressure units supplied with non-vented sight
- 2 to 8 feeds available

Standard Materials:

- Aluminum Construction
- Buna N seals
- Gage glass sight

Pressure Rating:

- Pressure applications up to 125 PSI (862 kPa) non-vented

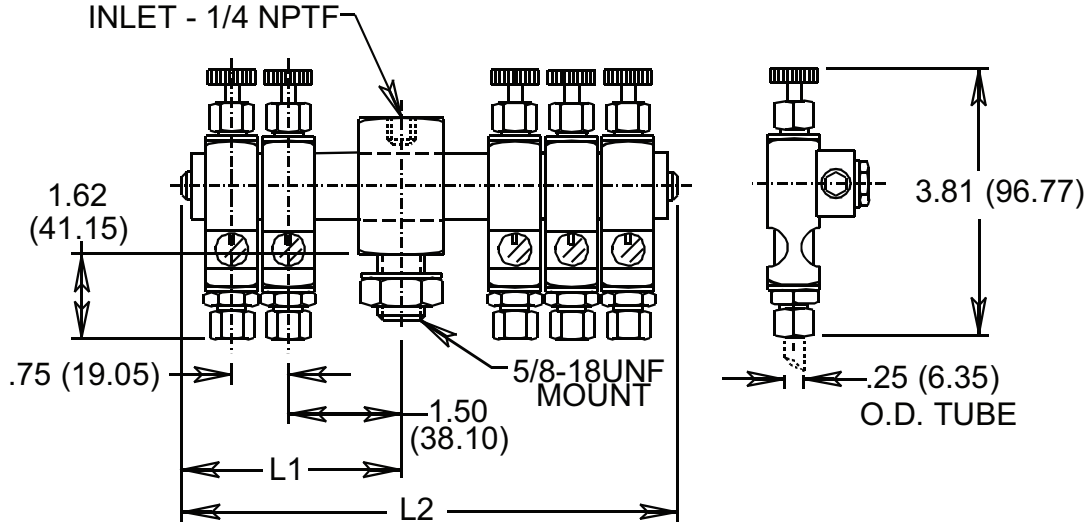

NOTE: All dimensions are inches (mm)



| NVM Series | | | | |
|----------------------|---------------------------|-------|----------------|----------------|
| Part No. | | Feeds | L1 inches (mm) | L2 inches (mm) |
| Gravity Vented Sight | Pressure Non-Vented Sight | | | |
| NVM102-002 | NVM102-102 | 2 | 2.09 (53.09) | 4.19 (106.43) |
| NVM102-003 | NVM102-103 | 3 | 2.09 (53.09) | 4.94 (125.48) |
| NVM102-004 | NVM102-104 | 4 | 2.84 (72.14) | 5.69 (144.53) |
| NVM102-005 | NVM102-105 | 5 | 2.84 (72.14) | 6.44 (163.58) |
| NVM102-006 | NVM102-106 | 6 | 3.59 (91.19) | 7.19 (182.63) |
| NVM102-008 | NVM102-108 | 8 | 4.34 (110.24) | 8.69 (220.73) |

MODIFICATIONS AVAILABLE MADE TO ORDER - CONSULT OUR FACTORY (MINIMUM ORDER MAY BE REQUIRED)

Dimensions and specifications are subject to change without notice. Not all items are Made-To-Stock, contact us for availability.

02/14

Ph : 920-682-6877
Fx : 920-684-7210



sales@ldi-industries.com
www.ldi-industries.com