

NASON

MODEL XM




(formerly SMX)

- SNAP ACTION SWITCH
- FACTOR Y PRESET
- NEMA 4,13

OPTIONS

- 10 AMP CONT ACT
- GOLD CONT ACT FOR LOW CURRENT APPLICATION
- WIDE RANGE OF DIAPHRAGM MATERIALS

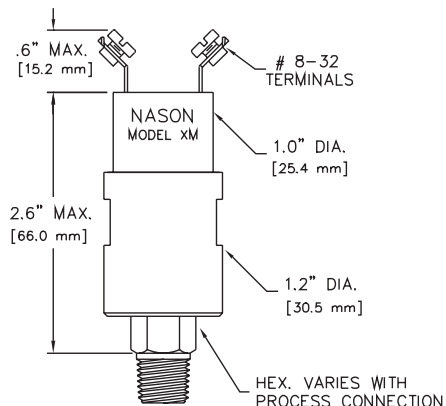

STANDARD SPECIFICATIONS

Set Point Range:	40-4000 PSI	(1.3 - 289 BAR)
Set Point Tolerance:	±5 PSI OR 5%	(.34 BAR)
Maximum Operating Pressure:	5000 PSI	(344 BAR)
Proof Pressure:	15000 PSI	(1034 BAR)
Differential:	8-16%	
Current Rating:	5 AMP	
Media Connection:	1/4" NPT MALE STEEL	
Circuit Form:	SPST-NO or SPST-NC	
Electrical Connection:	8-32 SCREW TERMINALS	
Diaphragm Material:	BUNA N	

OPTIONAL SPECIFICATIONS

Example - how to order: XM- 1 A - 1 5 0 0 R /

XM- - /

MEDIA CONNECTION

- 1- 1/4" NPT MALE
- 2- 1/8" NPT MALE
- 4- 7/16" - 20 SAB 7° FLARE (4)
- 6- 7/16" - 20 SAB RING (4)
- 11- 9/16" - 18 SAB RING (6)

FIXED SET POINT

40-4000 PSI

CIRCUIT FORM


- A - SPST-NO
- B - SPST-NC
- C - SPDT

SETTING DIRECTION

- R - RISING
- F - FALLING

ELECTRICAL OPTIONS

- WL- WIRE LEADS
- QG 1/4" SAE CONNECTION
- WP- WEATHER PACK
- HR- DIN 43650 CONNECTOR
- MP- METRI-PACK
- AT- 10 AMP
- GG- INTERNAL GROUND
- AU- GOLD CONTACTS



WL *

WIRE LEADS - OPTION "WL"
• 18 AWG WIRE, 18" LONG

*COLOR CODE:

- BLACK - COMMON
- RED - NORMALLY OPEN
- BLUE - NORMALLY CLOSED