

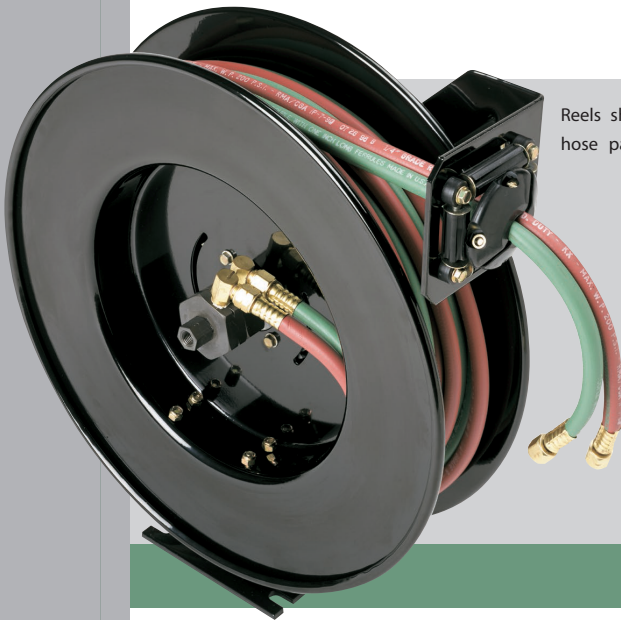


HOSE REELS



Reels shipped standard sf
hose payout position.



Mounting Slots
1/2" wide x 3/4" deep
for max 7/16" dia. bolt

Oxy Inlet — 1/4" FPT Max. Temp. — 200°F
Acet Inlet — 1/4" FPT

For 1/4 " Siamese Hose

Oxygen/Acetylene Hose Reel

Reel is ideally applied when space and safety is required in the welding & cutting area. The reel is capable of storing and dispensing 50' length of twin siamese welding hose.

FEATURES

- The exclusive dual hex was designed by the original designer of this dual body concept
- The major advantage of the swivel design is that in the event of an O-ring failure, the gases will go to atmosphere instead of mixing
- Safety banded drive spring
- The swivel is marked for the acetylene side with notches on the hex nuts for easy identification
- Beaded edges on spool prevents hose damage or injury to operator
- 8-position guide arm

Model Number	Operating Pressure	Hose I.D.	Hose Length	Shipping Weight
COA-200*	1000 PSI	1/4 IN.	—	43#
COA-250	200 PSI	1/4 IN.	50 FT. (Twin)	54#
UTL-200-OA*	1000 PSI	1/4 IN.	—	36#
UTL-250-OA	200 PSI	1/4 IN.	50 FT. (Twin)	44#

COA models are the C series, heavy duty standard reels.

UTL models are the Unitract series, lighter duty reels not designed for truck mount applications.

* Models without hose.

