
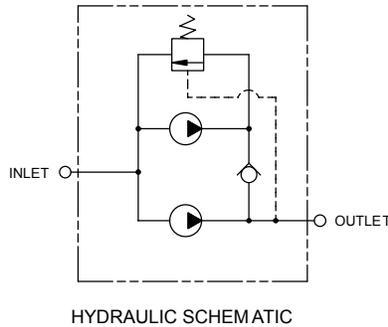


**L24 and L26 Series 2 Stage HI-LO Pumps**

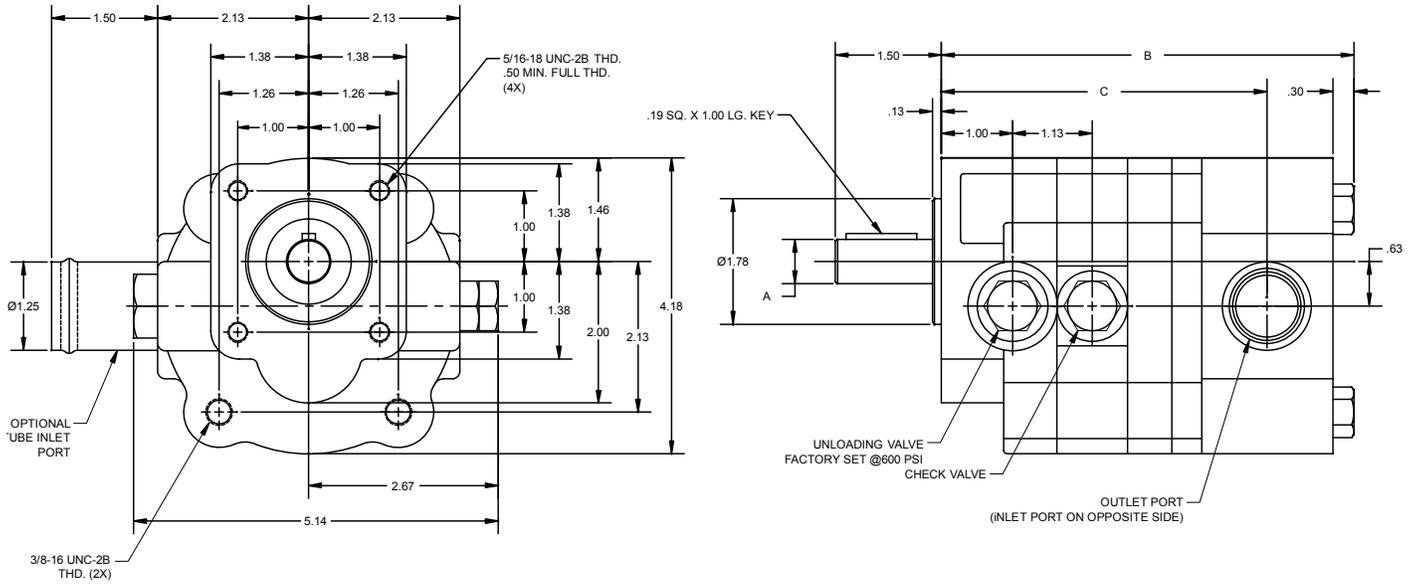


Unloading Valve is factory set at 600 PSI.  
 Rotation: All models rotate clockwise facing pump shaft or drive end (CWDE).  
 Mounting: 4F17 four bolt all models.

MODEL	0 PSI DISP. IN <sup>3</sup> /REV	MAX. PSI	MAX. RPM	~GPM AT 3450 RPM	HP REQUIRED	INLET	OUTLET	A	B	C
L24-2	.880 + .222	3000	3600	16\2.5	10	1 NPTF	3/4 NPTF	0.625	5.52	4.30
L26-2	1.000 + .416	3000	3600	20\5.0	12	1.25 " TUBE	3/4 NPTF	0.625	5.82	4.59


Note: Displacement given as larger gear set + smaller gear set.  
 ~ GPM given as combined flow\sequenced flow.  
 Operation @1725 RPM will give ~ 50% of combined flow and ~ 40% of sequenced flow.

**WARNING:** The specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.


L24 and L26 Series 2 Stage HI-LO Pumps

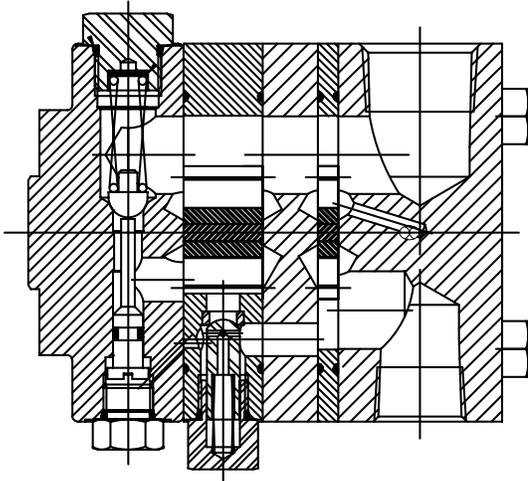

SECTION B-B

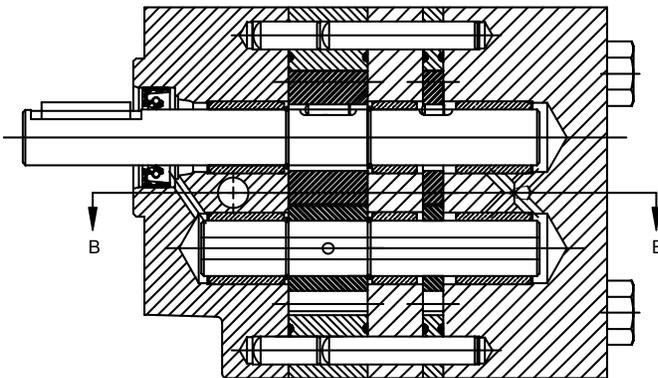

SECTION A-A

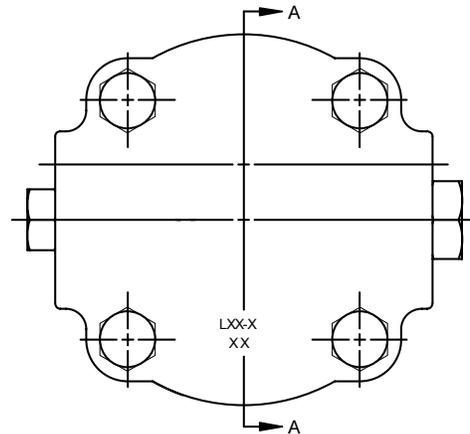

**WARNING:** The specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.