



**Pre-Engineered Circuit, Option Model K\***

BASE BODY - 20200011 = #6 SAE



BODY WEIGHT: 1.50 lbs. [.68 kg.]

**DESCRIPTION**


Pre-engineered circuit, option model K\*

**OPERATION**

See model options for specific operation (back)

**VALVE SPECIFICATIONS**

Nominal Flow	See Circuit for Flow Range (Back)
Rated Operating Pressure	400-4500 PSI (28-275 bar)
Viscosity Range	36 to 3000 SSU (3 to 647 cSt)
Filtration	30 micron nominal
Media Operating Temperature Range	-40° to 250° F (-40° to 120° C)
Operating Fluid Media	General Purpose Hydraulic Fluid
Cartridge Size	Delta Series 7/8-14 Thread.
Cartridge Torque Requirements	30 ft-lbs (40.7 Nm)
Coil Torque Nut Requirements	6 ft-lbs. (8.1 Nm)

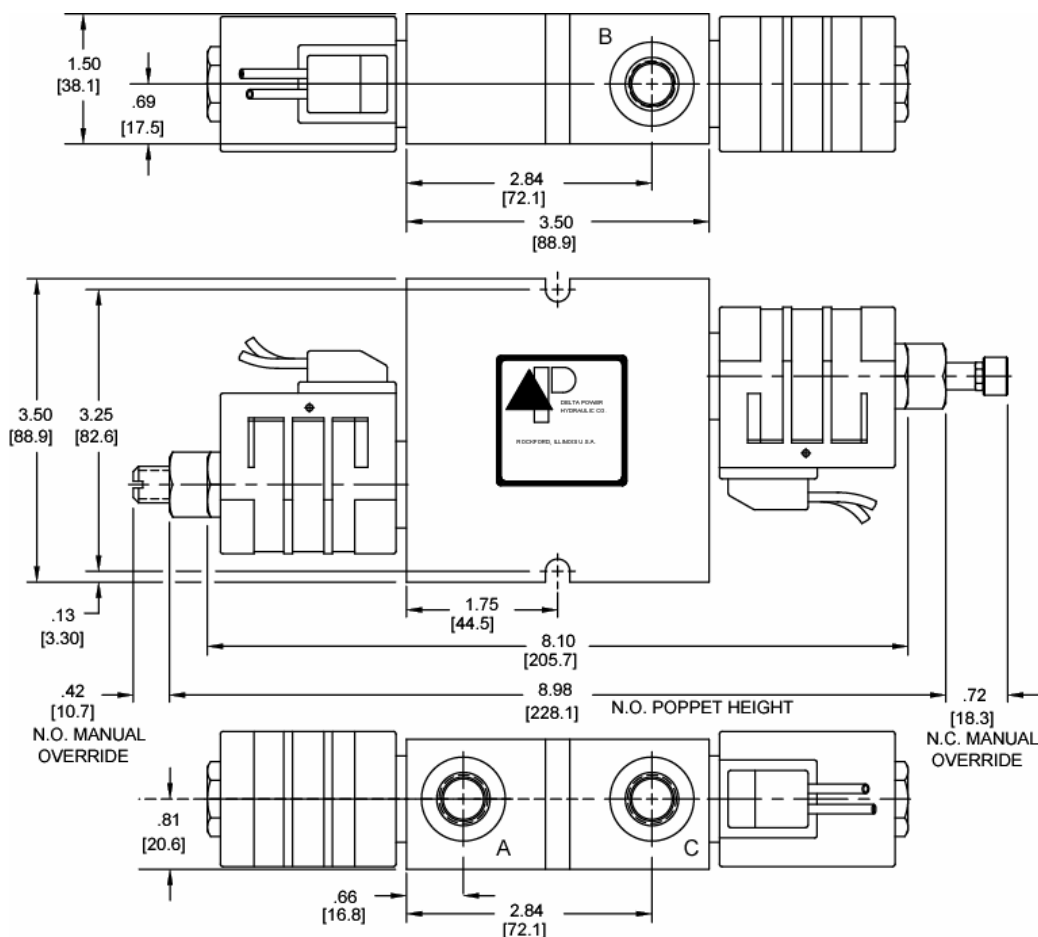**DIMENSIONS**


**WARNING:** The specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.

Phone: (815) 397-6628

Fax: (815) 397-2526

 E-mail: [delta@delta-power.com](mailto:delta@delta-power.com)