


PILOT PISTON ASSEMBLIES

DESCRIPTION

These pistons are used in a manifold to create pilot operated valve assemblies, such as pilot operated checks.

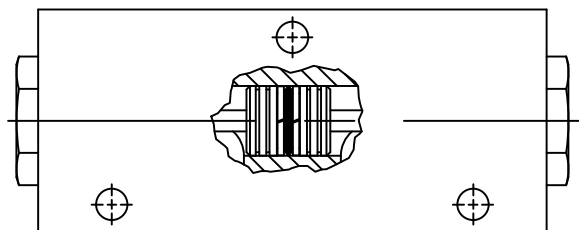

FEATURES

- O-rings on piston are optional.
- One piece design or pressed fit dowel pins
- Single or double pilot piston options.

PISTON SPECIFICATIONS

VALVE SERIES	VALVE SERIES	VALVE SERIES
MINI	.193	6.7:1
POWER	.250	4:1
DELTA	.312	4:1
SUPER	.590	3.7:1

<p>MINI SERIES</p>	<p>POWER SERIES</p>
<p>DELTA SERIES</p>	<p>SUPER SERIES</p>

CAVITY INFORMATION	SERIES	BORE DIAMETER	DOUBLE - SPOTFACE DIM.	SINGLE - SPOTFACE DIM.
		A	B	C
	MINI	.500/.502	3.313	2.031
	POWER	.500/.502	4.250	2.406
	DELTA	.625/.627	4.500	2.750
	SUPER	1.126/1.128	6.938	4.000

ORDERING INFORMATION

	PISTON		SEALS		PILOT PIN OPTIONS
	MINI Series .500 DIA	M	B Buna	S Single	
	POWER Series .500 DIA	P	V Viton	D Double	
	DELTA Series .625 DIA	D	O Omit		
	SUPER Series 1.12 DIA	S			

WARNING: the specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.

W 40 / 2017



4484 Boeing Drive Rockford, IL 61109 • USA • Phone +1 (815) 397-6628 • Fax +1 (815) 397-2526
 mail: delta@delta-power.com • www.delta-power.com



Via Malavolti, 36 • 41122 Modena • ITALY • Phone +39 (059) 254895 • Fax +39 (059) 253512
 mail: tecnord@tecnord.com • www.tecnord.com