




D05 Extra High Flow Parallel Circuit Manifold

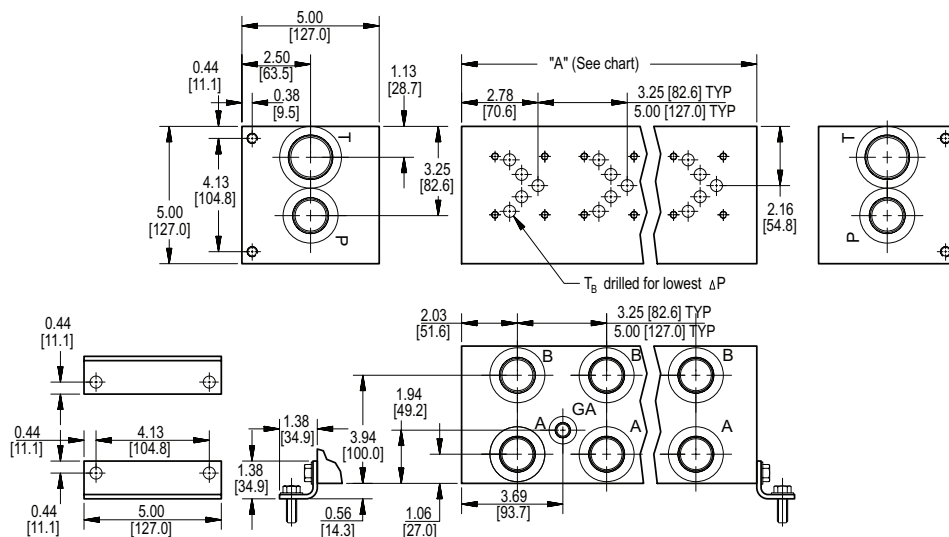

Rated flow Pressure 41 gpm @ 15 fps
Rated flow Tank 72 gpm @ 15 fps

No. of stations	* 01	02	03	04	05	06	07	08	09	10
"A" length (code 3 spa.) inch [mm]	4.25 [108.0]	7.50 [190.5]	10.75 [273.1]	14.00 [355.6]	17.25 [438.2]	20.50 [520.7]	23.75 [603.3]	27.00 [685.8]	30.25 [768.4]	33.50 [850.9]
apx. weight alum lb [kg]	10 [5]	18 [8]	26 [12]	35 [16]	43 [20]	51 [23]	59 [27]	67 [30]	75 [34]	83 [38]
apx. weight ferrous lb [kg]	27 [12]	48 [22]	69 [31]	91 [41]	112 [51]	133 [60]	154 [70]	175 [79]	196 [89]	217 [99]
"A" length (code 5 spa.) inch [mm]	--	9.25 [235.0]	14.25 [362.0]	19.25 [489.0]	24.25 [616.0]	29.25 [743.0]				
apx. weight alum lb [kg]	--	23 [10]	35 [16]	48 [22]	60 [27]	73 [33]				
apx. weight ferrous lb [kg]	--	60 [27.2]	92 [41.8]	125 [56.8]	157 [71.3]	190 [86.3]				

* Length of 01 station with relief cavity is 5.50 [139.7]. Gauge port not available on 01 station.

All mounting hardware is supplied.
See page 65 for itemized list.

Port code	Valve mtg.	Manifold mtg.
P, S	0.25-20 UNC x 0.75 [19] DP	0.38-16 UNC x 0.75 [19] DP
B, M, T	M6 ISO 6H x 0.75 [19] DP	M10 ISO 6H x 0.75 [19] DP

Specifications, descriptions, and dimensional data are subject to correction or change without notice or incurring obligation.
Download latest catalog page revisions at www.daman.com.

Ordering Information

For **coating options**
see pages 245-246.

Material	Valve Pattern	Circuit	No. of Stations	Valve Spacing	Port Threads	/	Options
----------	---------------	---------	-----------------	---------------	--------------	---	---------

Material	
A	Aluminum - 6061-T6 3000† psi • 20.7 MPa
D	Ductile Iron - D4512 5000† psi • 34.5 MPa

† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.

Circuit	
JP	Parallel Circuit Extra High Flow

Valve Spacing	
3	3.25 inch 82.6 mm
5	5.00 inch 127.0 mm

Valve Pattern	
D05	ISO 4401-05-04 NFPA T3.5.1-D05 See Tech Information


No. of Stations	
Aluminum	
01...10	Available with spacing code 3
02...06	Available with spacing code 5
Ductile Iron	
01...10	Available with spacing code 3
02...06	Available with spacing code 5

Port Threads		P,A,B	T	X,Y,L optional	GA
P	NPTF • ANSI B1.20.3	1.00	1.25	0.38	0.25
S	SAE • ISO 11926	-16	-20	-6	-6
B	BSPP • ISO 1179	1.00	1.25	0.38	none
M	ISO • ISO 6149	M33	M42	M14	none
T	BSPT • ISO 7	1.00	1.25	0.38	none

Options	
See next page for available options and ordering codes.	

Options - D05 Extra High Flow Parallel Manifold

Pilot port location dimensions vary on (1) station manifolds and manifolds with isolations. Contact Daman for cavity locations if critical.

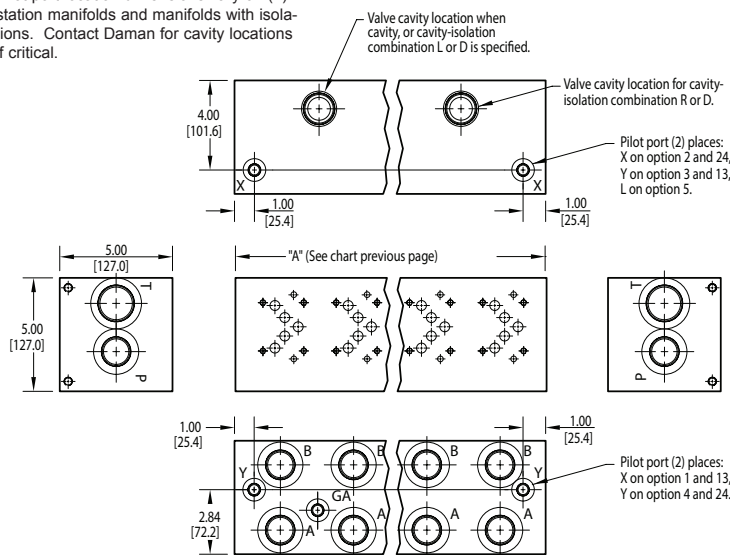

Parallel Circuit with X & Y

Parallel Circuit with L

Cavity & Isolation Combinations

ISOLATIONS

Daman isolation options allow a manifold to have two independent pressure and/or tank ports. Isolations are drilled rather than plugged to ensure a leakproof and failproof isolation.

Ordering code letter:	* Isolation is between stations:	Available # of stations:
3.25 [82.6] spacing		
A	01 & 02	02-10
B	02 & 03	03-10
C	03 & 04	04-10
D	04 & 05	05-10
E	05 & 06	06-10
F	06 & 07	07-10
G	07 & 08	08-10
H	08 & 09	09-10
J	09 & 10	10
5.00 [127.0] spacing		
A	01 & 02	02-06
B	02 & 03	03-06
C	03 & 04	04-06
D	04 & 05	05-06
E	05 & 06	06


* Stations are numbered left to right.

NOTES:


- 1) The GA port is not available on a (1) station manifold.
- 2) The GA port is not available when a pressure isolation is located between stations 1 & 2.
- 3) Some cavity and isolation combinations are not possible. Consult factory to determine availability.

Parallel Circuit with Cavity


Parallel Circuit with Isolations



Valves with P in the nose and T out the side must be used.



Manifold shown with P isolation between 1 & 2 (PA), and T isolation between 2 & 3 (TB).



Option code L: Cavity left of isolation
Option code R: Cavity right of isolation
Option code D includes both cavities

Ordering Information

...	Pilot Ports	Cavity	Pressure Isolation	Tank Isolation	Cavity & Isolation Combinations
-----	-------------	--------	--------------------	----------------	---------------------------------

Pilot Ports	
Omit if pilot ports not required	
1	X port (USA std) NFFPA T3.5.1-D05 Alt-B
3	Y port (USA std) NFFPA T3.5.1-D05 Alt-B
13	X & Y ports (USA std) NFFPA T3.5.1-D05 Alt-B
2	X port ISO 4401-05-05 NFFPA T3.5.1-D05 Alt-A
4	Y port ISO 4401-05-05 NFFPA T3.5.1-D05 Alt-A
24	X & Y ports ISO 4401-05-05 NFFPA T3.5.1-D05 Alt-A
5*	L ports Proportional valves

Cavity	
Omit if cavity not required	
C	Common cavity: With solenoid clearance. C-16-2 (P in nose)
S	Sun Cavity: T-16A (P in nose) See Tech Info for valves.

Tank Isolation	
Omit if T isolation not required	
TA...TJ	Available with spacing code 3
TA...TE	Available with spacing code 5

Pressure Isolation	
Omit if P isolation not required	
PA...PJ	Available with spacing code 3
PA...PE	Available with spacing code 5

Cavity & Isolation Combinations	
Specify when using a combination of cavity and isolation options. Cavities do have solenoid clearance.	
L	Relief cavity is located left of the isolation.
R	Relief cavity is located right of the isolation.
D	Two relief cavities, one each side of isolation.

* Cannot be combined with the following other pilot port options: /3, /13, /2, or /24