


# D05 Cover Plates


## Parallel Circuit Cover Plate

Cover Plate mounting hardware is supplied.  
See page 82 for itemized list.

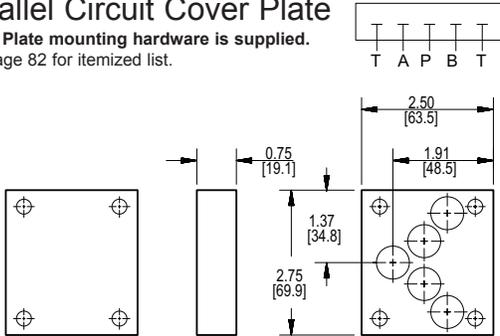


## Parallel Circuit Cover Plate with Gauge Port

Cover Plate mounting hardware is supplied.\*  
See page 82 for itemized list.  
\* Plug not supplied for metric gauge port.

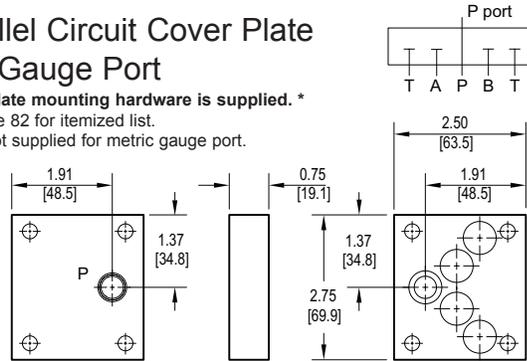


## Series Circuit Cover Plate: P to T

Cover Plate mounting hardware is supplied.  
See page 82 for itemized list.

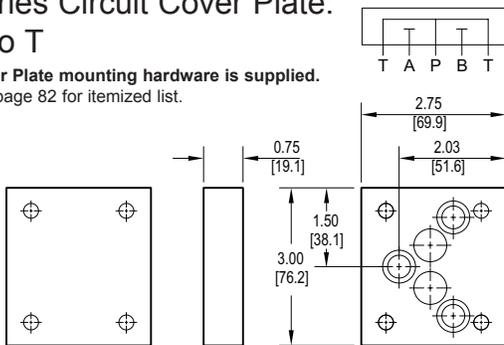

## Crossover Cover Plate: P to A; B to T or P to B; A to T

Cover Plate mounting hardware is supplied. See page 82 for itemized list.

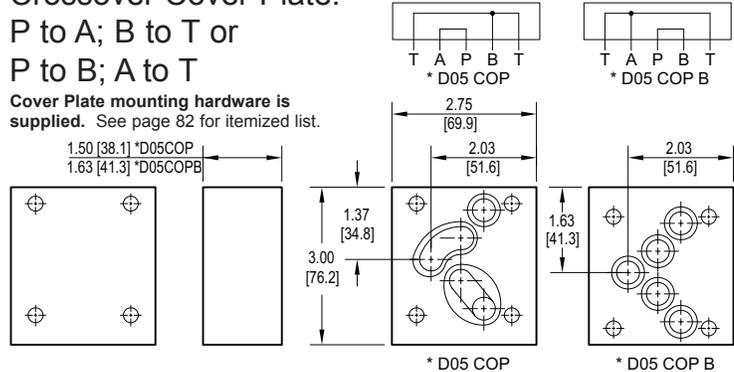

Specifications, descriptions, and dimensional data are subject to correction or change without notice or incurring obligation.  
Download latest catalog page revisions at [www.daman.com](http://www.daman.com).

# Ordering Information

Material	Valve Pattern	Circuit	Gauge Port	Bolt Threads																																
<table border="1"> <thead> <tr> <th colspan="2">Material</th> </tr> </thead> <tbody> <tr> <td><b>A</b></td> <td>Aluminum - 6061-T6 COP • 1500† psi • 10.3 MPa Other • 3000† psi • 20.7 MPa</td> </tr> <tr> <td><b>D</b></td> <td>Ductile Iron - D4512 COP • 3000† psi • 20.7 MPa Other • 5000† psi • 34.5 MPa</td> </tr> <tr> <td colspan="2">† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.</td> </tr> </tbody> </table>	Material		<b>A</b>	Aluminum - 6061-T6 COP • 1500† psi • 10.3 MPa Other • 3000† psi • 20.7 MPa	<b>D</b>	Ductile Iron - D4512 COP • 3000† psi • 20.7 MPa Other • 5000† psi • 34.5 MPa	† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.		<table border="1"> <thead> <tr> <th colspan="2">Valve Pattern</th> </tr> </thead> <tbody> <tr> <td><b>D05</b></td> <td>ISO 4401-05-04 NFPA T3.5.1-D05 See Tech Information</td> </tr> </tbody> </table>	Valve Pattern		<b>D05</b>	ISO 4401-05-04 NFPA T3.5.1-D05 See Tech Information	<table border="1"> <thead> <tr> <th colspan="2">Circuit</th> </tr> </thead> <tbody> <tr> <td><b>CPP</b></td> <td>Parallel Circuit</td> </tr> <tr> <td><b>CPS</b></td> <td>Series Circuit</td> </tr> <tr> <td><b>COP</b></td> <td>Crossover Circuit (P to A, B to T)</td> </tr> <tr> <td><b>COPB</b></td> <td>Crossover Circuit (P to B, A to T)</td> </tr> </tbody> </table>	Circuit		<b>CPP</b>	Parallel Circuit	<b>CPS</b>	Series Circuit	<b>COP</b>	Crossover Circuit (P to A, B to T)	<b>COPB</b>	Crossover Circuit (P to B, A to T)	<table border="1"> <thead> <tr> <th colspan="2">Gauge Port</th> </tr> </thead> <tbody> <tr> <td><b>G</b></td> <td>Available with parallel circuit only. Omit if not required. 0.250 NPTF or 0.250 BSPT (M option)</td> </tr> </tbody> </table>	Gauge Port		<b>G</b>	Available with parallel circuit only. Omit if not required. 0.250 NPTF or 0.250 BSPT (M option)	<table border="1"> <thead> <tr> <th colspan="2">Bolt Threads</th> </tr> </thead> <tbody> <tr> <td colspan="2">Omit for inch (UNC) bolt kit.</td> </tr> <tr> <td><b>M</b></td> <td>Metric (ISO 6H) bolt kit</td> </tr> </tbody> </table>	Bolt Threads		Omit for inch (UNC) bolt kit.		<b>M</b>	Metric (ISO 6H) bolt kit
Material																																				
<b>A</b>	Aluminum - 6061-T6 COP • 1500† psi • 10.3 MPa Other • 3000† psi • 20.7 MPa																																			
<b>D</b>	Ductile Iron - D4512 COP • 3000† psi • 20.7 MPa Other • 5000† psi • 34.5 MPa																																			
† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.																																				
Valve Pattern																																				
<b>D05</b>	ISO 4401-05-04 NFPA T3.5.1-D05 See Tech Information																																			
Circuit																																				
<b>CPP</b>	Parallel Circuit																																			
<b>CPS</b>	Series Circuit																																			
<b>COP</b>	Crossover Circuit (P to A, B to T)																																			
<b>COPB</b>	Crossover Circuit (P to B, A to T)																																			
Gauge Port																																				
<b>G</b>	Available with parallel circuit only. Omit if not required. 0.250 NPTF or 0.250 BSPT (M option)																																			
Bolt Threads																																				
Omit for inch (UNC) bolt kit.																																				
<b>M</b>	Metric (ISO 6H) bolt kit																																			

For **coating options**  
see pages 245-246.