



HOSE REELS

Inlet — 3/8" FPT Max. Temp. — 200°F



Mounting Slots
3/8" wide x 3/4" deep
for max 5/16" dia. bolt

Reels shipped standard of hose payout position. For ceiling mount add suffix sc.

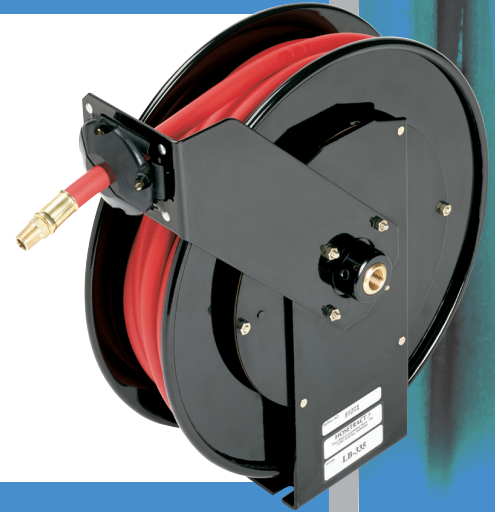

For 1/4" and 3/8" Hose I.D.

B Series

The B Series Reels are applied well where shorter, low volume hoses are used, such as auto-truck service garages for all air applications as well as anti-freeze, motor oil, ATF and grease. The all brass main shaft and swivel assure less corrosion for extended seal life in the low pressure rating (up to 1000 PSI).

MEDIUM PRESSURE Motor oil, ATF. Standard 1-wire braid hose furnished.

MB-300*	2500 PSI	3/8 IN.	—	22#
MB-320	2500 PSI	3/8 IN.	20 FT.	29#
MB-325	2500 PSI	3/8 IN.	25 FT.	30#
MB-330	2500 PSI	3/8 IN.	30 FT.	31#
MB-335	2500 PSI	3/8 IN.	35 FT.	32#

* Models without hose.

