



HOSE REELS

Inlet — 3/8" FPT Max. Temp. — 200°F



Mounting Slots
3/8" wide x 3/4" deep
for max 5/16" dia. bolt

Reels shipped standard of hose payout position. For ceiling mount add suffix sc.

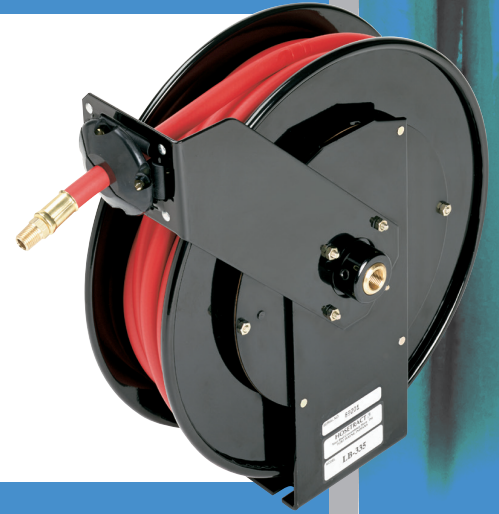

For 1/4" and 3/8" Hose I.D.

B Series

The B Series Reels are applied well where shorter, low volume hoses are used, such as auto-truck service garages for all air applications as well as anti-freeze, motor oil, ATF and grease. The all brass main shaft and swivel assure less corrosion for extended seal life in the low pressure rating (up to 1000 PSI).

HIGH PRESSURE Grease. Standard 2-wire braid hose furnished.

HB-200*	8000 PSI	1/4 IN.	—	23#
HB-220	5000 PSI	1/4 IN.	20 FT.	29#
HB-225	5000 PSI	1/4 IN.	25 FT.	30#
HB-230	5000 PSI	1/4 IN.	30 FT.	31#
HB-235	5000 PSI	1/4 IN.	35 FT.	32#

* Models without hose.

