


# HOSE REELS

LG & MG — Inlet 1/2" FPT    Max. Temp. — 200°F  
 HG — Inlet 3/8" FPT

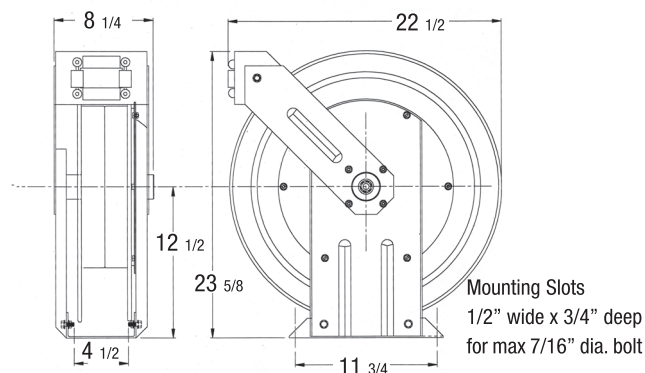

Reels shipped standard  
 sf hose payout position.  
 For ceiling mount add  
 suffix sc.

Standard Black  
 Powder Coat



For 3/8" and 1/2" Hose I.D. - Heavy Duty • Dual Base • Dual Guide Arm

## G Series

**LOW PRESSURE** reels are ideally suited for plant maintaining, service trucks or many other industrial functions where hose storage is a problem. Standard hose for air, water, and antifreeze solutions. Other hoses available upon request.

Model Number	Operating Pressure	Hose I.D.	Hose Length	Shipping Weight
LG-300*	1000 PSI	3/8 IN.	—	75#
LG-375	300 PSI	3/8 IN.	75 FT.	90#
LG-3100	300 PSI	3/8 IN.	100 FT.	95#
LG-500*	1000 PSI	1/2 IN.	—	75#
LG-550	300 PSI	1/2 IN.	50 FT.	85#
LG-575	300 PSI	1/2 IN.	75 FT.	95#

\* Models without hose.

