


HOSE REELS

LG & MG — Inlet 1/2" FPT Max. Temp. — 200°F
 HG — Inlet 3/8" FPT

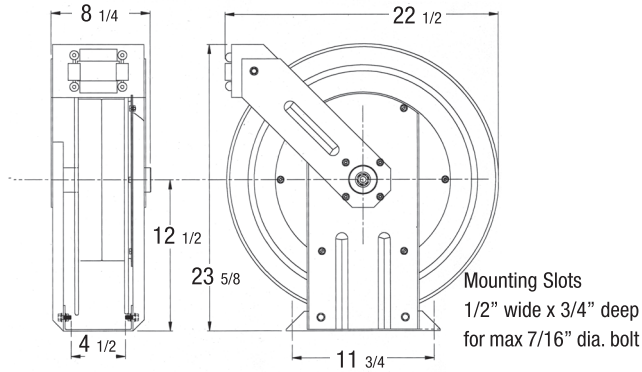

Reels shipped standard
 sf hose payout position.
 For ceiling mount add
 suffix sc.

Standard Black
 Powder Coat



For 3/8" and 1/2" Hose I.D. - Heavy Duty • Dual Base • Dual Guide Arm

G Series

MEDIUM PRESSURE reels are required when higher pressures are involved for air, water, or heavier oils.
 Standard 1-wire braid hose furnished.

MG-300*	4000 PSI	3/8 IN.	—	75#
MG-375	2500 PSI	3/8 IN.	75 FT.	90#
MG-500*	4000 PSI	1/2 IN.	—	75#
MG-550	2500 PSI	1/2 IN.	50 FT.	85#
MG-575	2500 PSI	1/2 IN.	75 FT.	95#

* Models without hose.

