


HOSE REELS

LG & MG — Inlet 1/2" FPT Max. Temp. — 200°F
 HG — Inlet 3/8" FPT

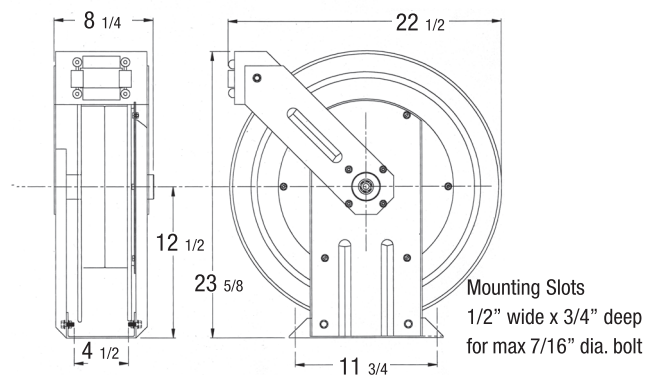

Reels shipped standard
 sf hose payout position.
 For ceiling mount add
 suffix sc.

Standard Black
 Powder Coat



For 3/8" and 1/2" Hose I.D. - Heavy Duty • Dual Base • Dual Guide Arm

G Series

HIGH PRESSURE reels are used exclusively where grease is being applied as in lube applications for off-road service or garage lube systems. Standard 2-wire braid hose furnished.

HG-2100	5000 PSI	1/4 IN.	100 FT.	90#
HG-300*	8000 PSI	3/8 IN.	—	75#
HG-350	5000 PSI	3/8 IN.	50 FT.	85#
HG-375	5000 PSI	3/8 IN.	75 FT.	90#

* Models without hose.

