
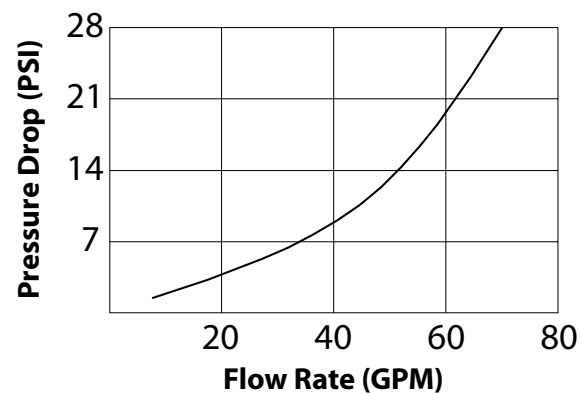
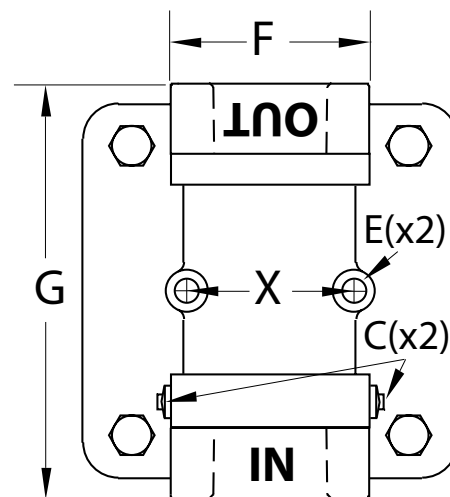


Cartridge Return Filter Headers

- Flows to 75 GPM (Return)
- 1-1/4" NPTF Ports
- Working Pressure 350 PSI
- Operating Temperatures -22°F to +212°F
- 10 Micron Cellulose Element
- 25 PSI By-Pass
- Aluminum Casting
- Buna Seals
- Compatible with mineral oils HH, HL, HM, HR, HV, HG, synthetic fluids A and M series types HS, HFDR, HFDS, HFDU and water based emulsions HFAE, HFAS according to ISO 6743/4
- Aluminum Bowl with 3/8" NPTF Drain Plug
- 1/8" NPTF Indicator Gauge Ports

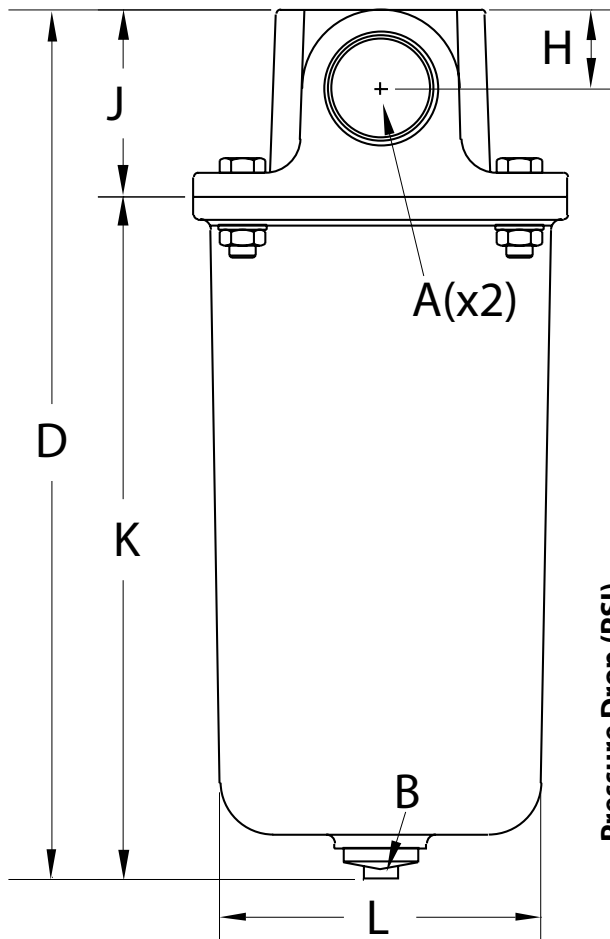

Stock Number	A	B	C	D	E	F	G	H	J	K	L	X
3953011	1-1/4" NPTF	3/8" NPTF	1/8" NPTF	11.81"	3/8 - 16	2.24"	5.59"	1.22"	2.56"	9.25"	4.65"	2.25"