
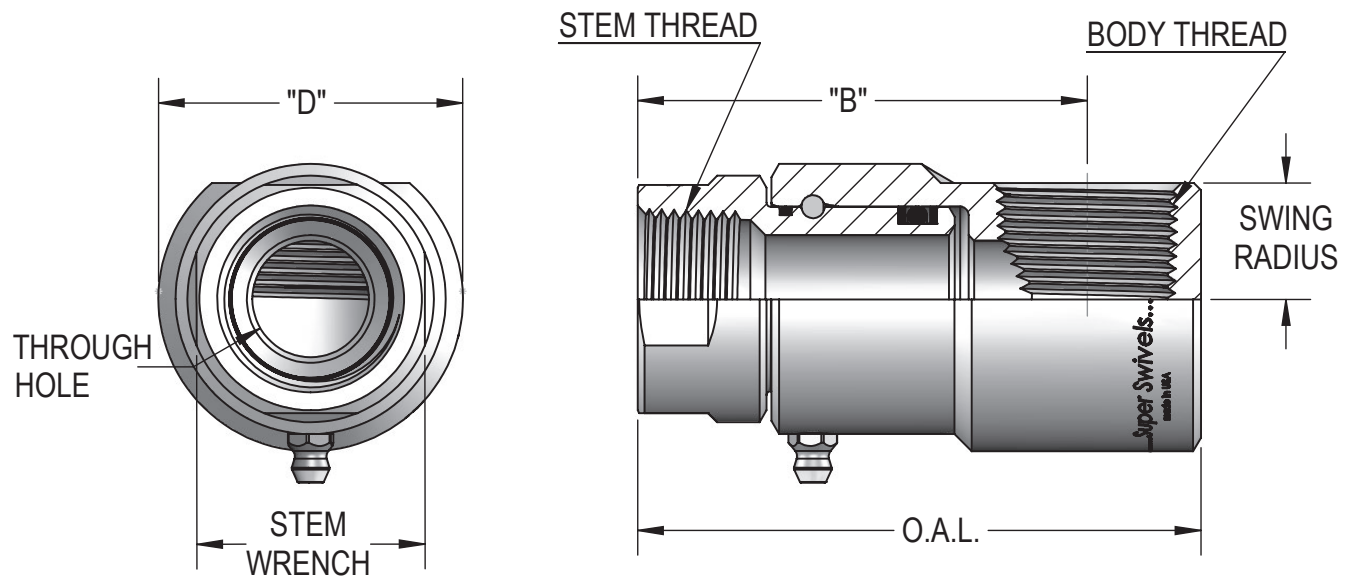


Female Pipe (N.P.T.F.) X Female Pipe (N.P.T.F.)

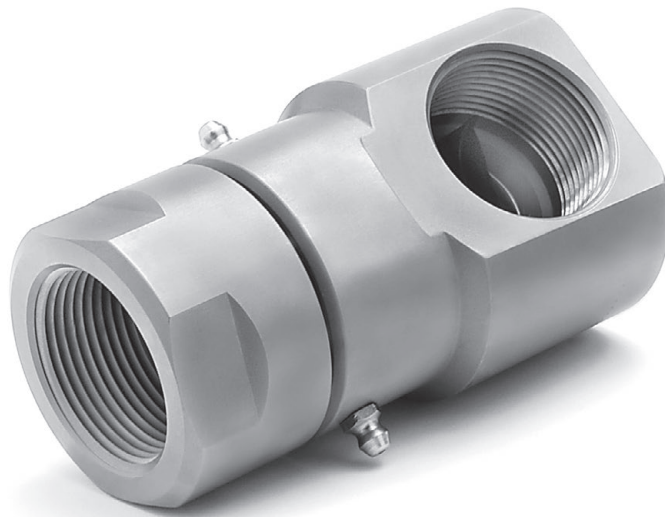

PART NUMBER	O.A.L.	DIM. B	DIM. D ϕ	STEM THREAD	BODY THREAD	STEM WRENCH	SWING RADIUS	MAX P.S.I.G.	THROUGH HOLE
9 SS 4 FP 25 X FP 25-440	2.335	1.965	1.190	1/4-18 N.P.T.F.	1/4-18 N.P.T.F.	.750	.525	5000	ϕ .250
9 SS 8 FP 38 X FP 38-440	2.540	2.060	1.500	3/8-18 N.P.T.F.	3/8-18 N.P.T.F.	.875	.650	5000	ϕ .530
9 SS 8 FP 50 X FP 50-440	2.825	2.280	1.500	1/2-14 N.P.T.F.	1/2-14 N.P.T.F.	1.125	.585	5000	ϕ .530
9 SS 12 FP 75 X FP 75-440	3.035	2.370	1.710	3/4-14 N.P.T.F.	3/4-14 N.P.T.F.	1.375	.645	4500	ϕ .610
9 SS 16 FP 100 X FP 100-440	4.000	3.190	2.162	1-11.5 N.P.T.F.	1-11.5 N.P.T.F.	1.625	.825	4000	ϕ .827
9 SS 20 FP 125 X FP 125-440	4.370	3.400	2.598	1 1/4-11.5 N.P.T.F.	1 1/4-11.5 N.P.T.F.	2.000	.982	4000	ϕ 1.181
9 SS 24 FP 150 X FP 150-440	5.610	4.380	2.918	1 1/2-11.5 N.P.T.F.	1 1/2-11.5 N.P.T.F.	2.375	1.070	4000	ϕ 1.312
9 SS 32 FP 200 X FP 200-440	6.425	5.085	3.668	2-11.5 N.P.T.F.	2-11.5 N.P.T.F.	2.875	1.385	3000	ϕ 1.781