



INDUSTRIAL FLUID POWER COMPONENTS  
AND SYSTEMS



## D03 SERIES

### Pressure Switches




D03-PSA-3.6K



**D03-PSA-3.6K**


**Dimensional Data**

Units: mm (inches)

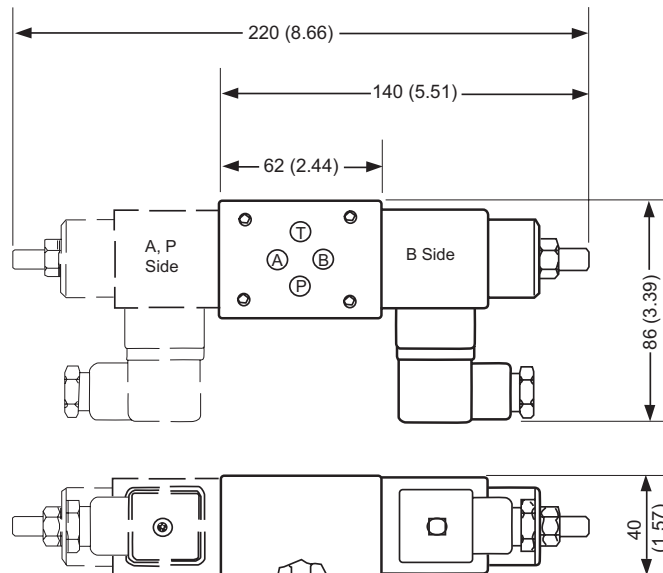


**Ordering Information**

**D03 - PSA - 3.6K**

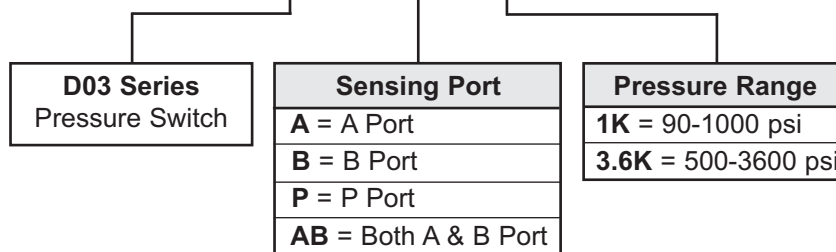

## Graphic Symbol

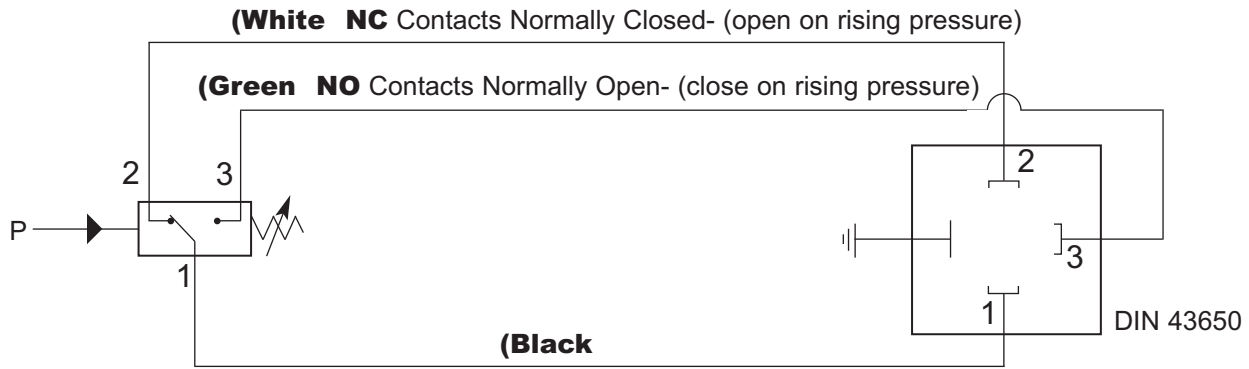

## Specifications

Fluid:  
Hydraulic, lubricating and light oils

Construction:  
Piston actuated

Adjustment Range:  
90 - 5200 psi (6 - 350 bar)

Ambient Temperature:  
(130° to 175° F (-25° to 80° C)

Maximum Viscosity:  
450 SSU (1000 mm<sup>2</sup>/s)

Maximum Switching Rate:  
20 cycles/ min

Repeatability:  
± 3%

Electrical Connection:  
DIN 43650 Table A

Mounting:  
Arbitrary

Switching Element:  
Microswitch

Switch Ratings:

	Resistive	Inductive
14 VDC	3A	1.5A
30VDC	2A	1A
120VAC	3A	1A
240VAC	3A	0.5A

## Hysteresis Diagrams (PSI)

