


Dual Trailer Setup

9502886



Dimensions

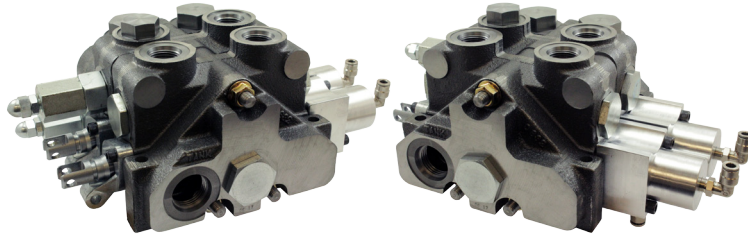

- This valve features one single acting spool with an adjustable work port relief from 1750-2200 PSI to run an end dump trailer and one dual acting spool with a system relief adjustable from 2200-3000 PSI to run a walking floor trailer, a side dump trailer, a belt trailer or any trailer that needs a dual acting spool.
- Control your end dump trailer and walking floor or end dump and side dump trailer from the seat of your truck with this pneumatic valve package
- Air tubing and toggle switch sold separately
- Pressure Port: #12 SAE O-Ring Boss
- Tank Port: #12 SAE O-Ring Boss
- A&B Ports: #10 SAE O-Ring Boss
- Air Connection: 1/4" Poly Tube
- Flow: 20 GPM
- Integrated System Relief: 3000 PSI Maximum


DOT Air Brake Tubing



- DOT Air Brake Tubing
- For Air Brake Systems
- SAE Type A (Single Wall Non-Reinforced Nylon)
- SAE Type B (Fiber Reinforced)
- Temperature Range: -40° to +200°
- Ultra-Violet Stabilizer
- Nylon Core and Braided Fiber (3/8" and Larger)
- Nylon Jacket

Stock Number	Color	Tubing Size (O.D.)	Roll Length	Ship Wt.
2135040	Black	1/4"	100'	1.20

Toggle Valves

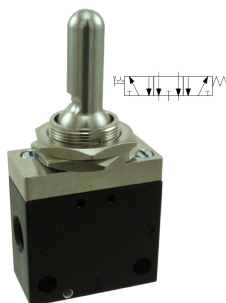

- Mountable controls for your PTO
- Can be mounted in dash
- 1/8" Ports
- () = Momentary

Stock Number	Port Size	Function	Ship Wt.
6475513	1/8"	Double Acting, (ON) - OFF - (ON)	0.33
6475514	1/8"	Double Acting, ON - OFF - (ON)	0.33