


Power Unit

9503530

• Pressure and Tank Unit • Designed to run a Hydraulic Squeeze Chute • Heavy Duty Powder Coated Frame • Tank: 15 Gallon Nominal, 12 Gallon Usable 12 Gauge Steel • 5" Level Sight/Temperature Gauge Standard • Engine includes low oil shutdown system • Heavy Duty Frame • Suction Filter: 100 Mesh Suction Filter with 3 PSI Bypass • Relief Valve Adjustable from 100-3000 PSI • Relief Valve: Preset to Power Units' Maximum Pressure Capability (1200 PSI) • Pumps: High Performance Helical Aluminum Body Gear Pump • Tank Drain Plug: #8 O-ring • Battery Included • Fully Tested Before Shipment • Engine Oil Onboard • Anti-Wear ISO 46 Hydraulic Oil Recommended, ATF Satisfactory • Replacement Components Available From Stock

Specifications

- 14 HP Kohler Motor with Electric Start
- 13 GPM Max Flow
- 1200 PSI Max
- 1/2" AG Body Pressure Coupler
- 3/4" AG Body Return Coupler
- Relief Valve, Adjustable From 100-3000 PSI
- Cold Start Valve
- Filler Breather Integral
- 10 Micron Spin-on Return Filter
- Battery Included
- #8 SAE O-Ring Drain Plug on Reservoir
- Powder Coated Frame
- 36" x 19.42" x 24.5" (L x W x H)
- 260Lbs Dry Weight

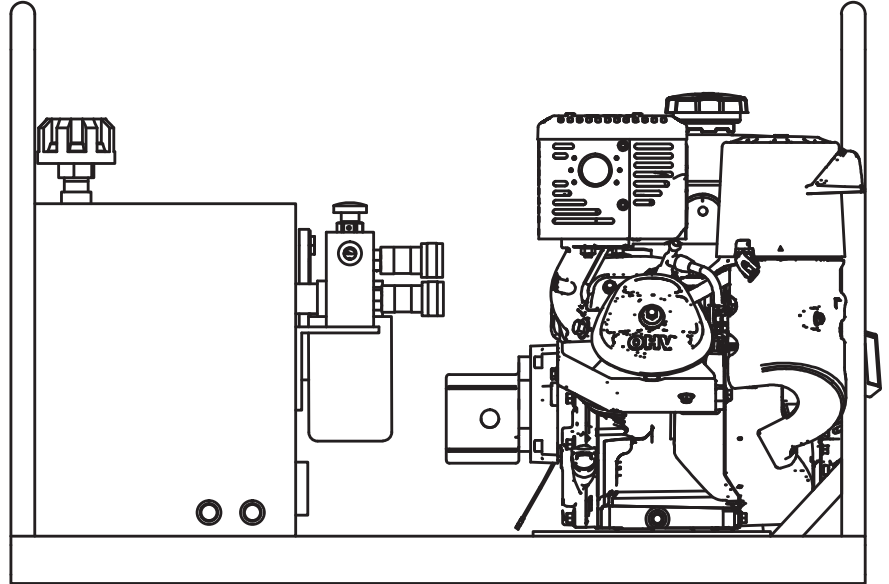

Stock Number	HP	GPM	PSI	Pressure Gauge	Tank Capacity	A & B Ports	Dimensions L x W x H	Ship Wt.
9503530	14	13	1200	100-3000 PSI	12 Gallons	#8 SAE O-Ring	36" x 19.42" x 24.5"	315

