


# PHASE CONVERTER IDLER MOTOR

**HP:** 3–75  
**Pole:** 4

**Frame:** 182–365  
**Volt:** 230/460V

**RPM:** 1800  
**Body:** T

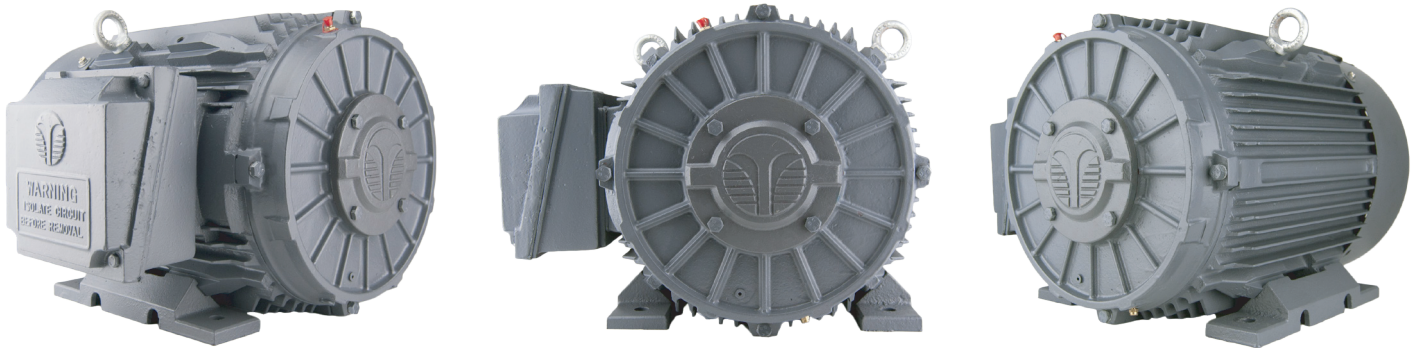

## STANDARD FEATURES

- TEFC - IP 55 Rated
- 3 Lead - 230V / 12 Lead - 460V
- Double Lip Oil Seals
- Cast Iron Construction
- Dual Oversized Bearings
- F1, F2, F3 Field Convertible (326T & Below)
- One-Way Brass Condensation Drains
- 24 Month Warranty

## 3 LEAD SINGLE VOLTAGE

HP	Model Number	Voltage
3	PC3-CI-TF-182T-4-B-B-3	230
5	PC3-CI-TF-184T-4-B-B-5	230
7.5	PC3-CI-TF-213T-4-B-B-7.5	230
10	PC3-CI-TF-215T-4-B-B-10	230
15	PC3-CI-TF-254T-4-BR-B-15	230
20	PC3-CI-TF-256T-4-BR-B-20	230
25	PC3-CI-TF-284T-4-BR-B-25	230
30	PC3-CI-TF-286T-4-BR-B-30	230
40	PC3-CI-TF-324T-4-BR-B-40	230
50	PC3-CI-TF-326T-4-BR-B-50	230
60	PC3-CI-TF-364T-4-BR-B-60	230
75	PC3-CI-TF-365T-4-BR-B-75	230

## 12 LEAD DUAL VOLTAGE

HP	Model Number	Voltage
3	PC3-CI-TF-182T-4-B-D-3	230/460
5	PC3-CI-TF-184T-4-B-D-5	230/460
7.5	PC3-CI-TF-213T-4-B-D-7.5	230/460
10	PC3-CI-TF-215T-4-B-D-10	230/460
15	PC3-CI-TF-254T-4-BR-D-15	230/460
20	PC3-CI-TF-256T-4-BR-D-20	230/460
25	PC3-CI-TF-284T-4-BR-D-25	230/460
30	PC3-CI-TF-286T-4-BR-D-30	230/460
40	PC3-CI-TF-324T-4-BR-D-40	230/460
50	PC3-CI-TF-326T-4-BR-E-50	230/460
60	PC3-CI-TF-364T-4-BR-D-60	230/460
75	PC3-CI-TF-365T-4-BR-D-75	230/460