


Single Phase Motor AC Power Unit

Pressure & Tank









Technical Information

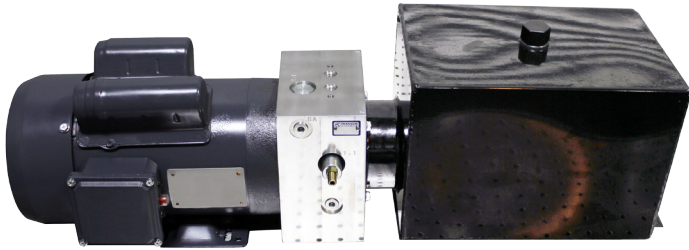

- Continuous Duty
- 1 HP, 1.5 HP, or 2 HP Available
- Single Phase
- CW Rotation
- Relief Valve Set at 3000 PSI
- #6 SAE O-Ring Pressure & Tank Ports
- #12 SAE O-Ring Auxiliary Tank Port
- Steel Tank
- Tank is Painted Black

Item Number	HP	Flow	Maximum Pressure	Voltage	Amps	Maximum RPM	Tank Capacity	Dim. A	Dim. B	Dim. C	Weight
9504808	1 HP	0.46 GPM	3000 PSI	115/208-230 V	9.3/4.95-4.65 A	1800	1 Gallon Round	25.07"	9.0"	6.63" DIAMETER	62 lbs
9504816	1 HP	0.46 GPM	3000 PSI	115/208-230 V	9.3/4.95-4.65 A	1800	1.5 Gallons Round	29.57"	13.5"	6.63" DIAMETER	63 lbs
9504824	1 HP	0.46 GPM	3000 PSI	115/208-230 V	9.3/4.95-4.65 A	1800	2.5 Gallons Square	29.32"	13.25"	8.0" SQUARE	69 lbs
9504832	1 HP	0.46 GPM	3000 PSI	115/208-230 V	9.3/4.95-4.65 A	1800	3.5 Gallons Square	33.95"	17.88"	8.0" SQUARE	72 lbs
9504872	1.5 HP	0.77 GPM	3000 PSI	115/208-230 V	13.3/7.2-6.65 A	1800	1 Gallon Round	25.07"	9.0"	6.63" DIAMETER	69 lbs
9504880	1.5 HP	0.77 GPM	3000 PSI	115/208-230 V	13.3/7.2-6.65 A	1800	1.5 Gallons Round	29.57"	13.5"	6.63" DIAMETER	70 lbs
9504888	1.5 HP	0.77 GPM	3000 PSI	115/208-230 V	13.3/7.2-6.65 A	1800	2.5 Gallons Square	29.32"	13.25"	8.0" SQUARE	76 lbs
9504896	1.5 HP	0.77 GPM	3000 PSI	115/208-230 V	13.3/7.2-6.65 A	1800	3.5 Gallons Square	33.95"	17.88"	8.0" SQUARE	79 lbs
9504936	2 HP	1.01 GPM	3000 PSI	115/208-230 V	17.3/10.4-8.65 A	1800	1 Gallon Round	25.07"	9.0"	6.63" DIAMETER	74 lbs
9504944	2 HP	1.01 GPM	3000 PSI	115/208-230 V	17.3/10.4-8.65 A	1800	1.5 Gallons Round	29.57"	13.5"	6.63" DIAMETER	75 lbs
9504952	2 HP	1.01 GPM	3000 PSI	115/208-230 V	17.3/10.4-8.65 A	1800	2.5 Gallons Square	29.32"	13.25"	8.0" SQUARE	81 lbs
9504960	2 HP	1.01 GPM	3000 PSI	115/208-230 V	17.3/10.4-8.65 A	1800	3.5 Gallons Square	33.95"	17.88"	8.0" SQUARE	84 lbs

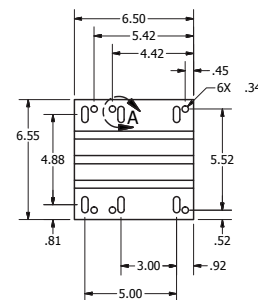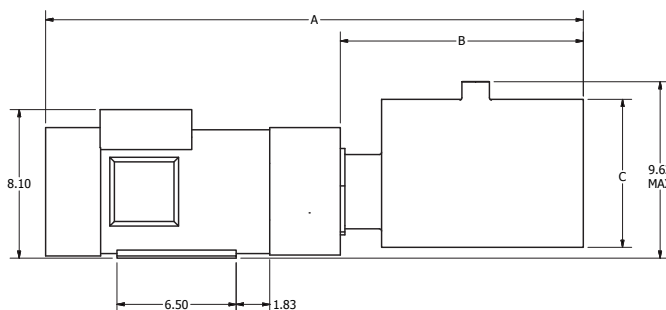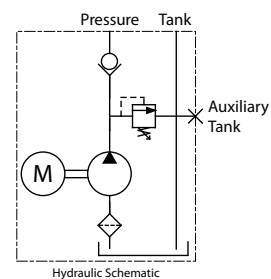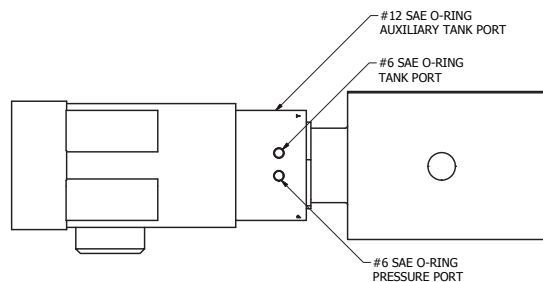

FOOT MOUNTING BRACKET

