

BREATHERS & FILLER BREATHERS

TOP MOUNT – STANDARD FLOW


Top Mount Filler Breathers are designed to be used as a filler port for tanks, hydraulic power units or other fluid containers. These units also let the tank breathe while keeping out airborne particles.

Standard Features:



- Bayonet zinc plated steel cap - large capacity
- Twist to lock removable cap breathes and filters air
- Concealed air vents allowing for outdoor applications
- Flute finger inserts for easy gripping (vented style only)
- 10 or 40 micron filtration (vented style only)
- Safety chain - prevents loss of cap
- Heavy duty Cork-Neoprene gasket provides a positive seal between flanges
- Zinc plated flange - bayonet flange (SAE J829)
- Strainer basket
 - 4 inch long Nylon with solid dome bottom to prevent punchout
 - 3 inch long Stainless Steel, 30 mesh
- Thread forming screws -- prevents particles from entering reservoir during installation by forming threads rather than cutting them




Standard Bayonet Style

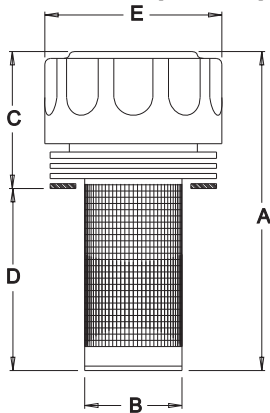

Mounting Information

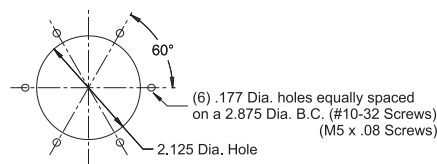

Non Vented Bayonet Style

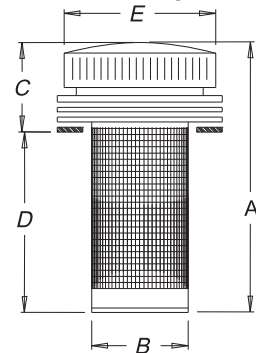

NOTE: All dimensions are inches

Technical and Dimensional Details

Part No.	Cap Style	Breather (PSI)	Strainer Basket Type	Air Filtration		Air Flow Capacity (CFM)	Oil Transfer Rate (GPM)	Bayonet Flange (inches)														
				Nominal Level	Media			A	B	C	D	E	F	G								
Non-Pressurized, Standard Filler Breather - Bayonet Style																						
5201	Standard	N/A	Nylon	40 Micron	Foam	25	192	6.10	1.90	2.30	3.80	3.00	3.25	2.88								
5204	Standard	N/A	Nylon	10 Micron	Foam	15	115	6.10	1.90	2.30	3.80	3.00	3.25	2.88								
5216	Standard	N/A	Stainless Steel	40 Micron	Foam	25	192	5.10	1.90	2.30	2.80	3.00	3.25	2.88								
5220	Standard	N/A	Stainless Steel	10 Micron	Foam	15	115	5.10	1.90	2.30	2.80	3.00	3.25	2.88								
Pressurized, Standard Filler Breather - Bayonet Style																						
5205	Standard	5	Stainless Steel	10 Micron	Foam	25	192	5.10	1.90	2.30	2.80	3.00	3.25	2.88								
Non-Pressurized, Non-Vented Filler Breather - Bayonet Style																						
5232	Non Vented	N/A	Nylon	N/A	N/A	N/A	N/A	6.10	1.90	1.30	3.80	2.44	3.25	2.88								
5227	Non Vented	N/A	Stainless Steel	N/A	N/A	N/A	N/A	5.10	1.90	1.30	2.80	2.44	3.25	2.88								
Non-Pressurized, Metric Mounting Filler Breather - Bayonet Type																						
5203	Standard	N/A	Nylon	40 Micron	Foam	25	192	6.10	1.90	2.30	3.80	3.00	3.25	2.88								

Ordering Information Options

- For Locking Tabs add LT to part number (3/8 inch dia. hole to accept padlock)(not available in non vented breathers)

Dimensions and specifications are subject to change without notice. Not all items are Made-To-Stock, contact us for availability.

07/17

Ph : 920-682-6877
Fx : 920-684-7210



sales@ldi-industries.com
www.ldi-industries.com