


# Nickel-Plated Brass BSPT Reducing Nipple Fittings 2510

Thread Type : BSPT (R1/8, R1/4, R3/8, R1/2, R3/4)

BSP THREADS							
DIMENSIONS (in mm)							
Model	A1	A2	H1	H2	L	SW	Weight (g)
2510 1/8-1/4	R1/8	R1/4	7.5	11	23.5	14	14
2510 1/8-3/8	R1/8	R3/8	7.5	11.5	24	17	18
2510 1/4-3/8	R1/4	R3/8	11	11.5	27.5	17	20
2510 1/4-1/2	R1/4	R1/2	11	14	30.5	22	34
2510 3/8-1/2	R3/8	R1/2	11.5	14	31	22	34
2510 1/2-3/4	R1/2	R3/4	14	16.5	37.5	27	67

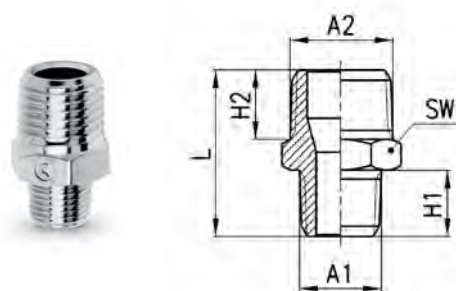

When involved in factory maintenance or plant installation it is often difficult to be absolutely certain which size of fittings will be required. Pipe fittings provide a cost effective solution to this problem. The full range includes straight, L-shaped, T-shaped and cross piece male or female couplings and are available in a variety of thread sizes up to 3/4".

The addition of the Camozzi **Sprint®** seal to twelve different models of pipe fittings eliminates the need to use liquid sealants or tape and save a considerable amount of time during installation. The Sprint® fitting can be connected and disconnected several times.

Material: brass OT58 UNI 5705 (nickel-plated).  
T. min. - 40°C (-40°F)  
T. max. +120°C (250°F)

## GENERAL DATA

Material	nickel-plated brass (UNI 5705 OT58) and PTFE
Threads	10-32 UNF, 1/8", 1/4", 3/8", 1/2" NPTF GAS conical ISO 7 (BSPT), typically models ending in "0" and/or with Sprint "S" prefix GAS cylindrical ISO 228 (BSP), typically models ending with "1", (2651/2661 gaskets required are sold separately)
Pressure	40 bar (0 to 580 psi)
Fluid	Compressed air or other low pressure fluids
Temperature	-40°C - 120°C (-40 F to 250 F)

## Pipe fittings

